

TECHNICAL DATA

●INTERNATIONAL SYSTEM OF UNITS (SI)	1627
●HARDENING AND HARDNESS TESTS	1629
●CONVERSION TABLE OF HARDNESS	1630
●SURFACE ROUGHNESS	1631
●METHODS OF INDICATING PRODUCT SURFACES IN DRAWINGS	1632
●SURFACE ROUGHNESS BY DIFFERENT MACHINING METHODS	1633
●INDICATIONS OF GEOMETRICAL TOLERANCE ON DRAWINGS	1634
●BASIS OF SELECTION FOR FITS	1635
●DIMENSIONAL TOLERANCES AND FITS	1636
●TOLERANCES OF REGULARLY USED HOLE FITS	1637
●TOLERANCES OF REGULARLY USED SHAFT FITS	1638
●GENERAL DIMENSIONAL TOLERANCES FOR PARTS FORMED BY PRESS WORKING FROM SHEET METAL AND SHEAR FROM METAL PLATES	1639
●STANDARD MACHINING TOLERANCES	1640
●HEXAGON SOCKET HEAD CAP SCREWS	1641
●TABLE OF HOLE SIZES BEFORE THREADING	1643
●PROPER BOLT AXIAL TIGHTENING FORCE / TORQUE	1644
●STRENGTH OF BOLTS, SCREW PLUGS, AND DOWEL PINS	1645
●CALCULATION OF CUBIC VOLUME AND MATERIAL PHYSICAL PROPERTIES	1646
●CALCULATION OF AREA, CENTER OF GRAVITY, AND GEOMETRICAL MOMENT OF INERTIA	1647
●CONVERSION CHART OF TRIGONOMETRICAL FUNCTIONS	1649
●COMPARISON OF MATERIAL JIS AND RELATED OVERSEAS STANDARDS (1)	1651
●COMPARISON OF MATERIAL JIS AND RELATED OVERSEAS STANDARDS (2)	1653
●COMPARISON OF DIE STEEL BY MANUFACTURERS	1655
●HARDNESS OF PRIMARY STEEL MATERIALS AND THE CORRESPONDING TOOLS	1656

1. The International System of Units (SI) and its usage

1—1. Scope of application This standard specifies the International System of Units (SI) and how to use units under the SI system, as well as the units which are or may be used in conjunction with SI system units.

1—2. Terms and definitions The terminology used in this standard and the definitions thereof are as follows.

- (1) **International System of Units (SI)** A consistent system of units adopted and recommended by the International Committee on Weights and Measures. It contains base units and supplementary units, units derived from them, and their integer exponents to the 10th power. SI is the abbreviation of System International d'Unités (International System of Units).
- (2) **SI units** A general term used to describe base units, supplementary units, and derived units under the International System of Units (SI).
- (3) **Base units** The units shown in **Table 1** are considered the base units.
- (4) **Supplementary units** The units shown in **Table 2** below are considered the supplementary units.

Table 1. Base Units

Measure	Unit name	Unit symbol	Definition
Length	Meter	m	A meter is the length of the path traveled by light in a vacuum during a time interval of $\frac{1}{299\,792\,458}$ of a second.
Mass	Kilogram	kg	A kilogram is a unit of mass (not weight or force). It is equal to the mass of the international prototype of the kilogram.
Time	Second	s	A second is the duration of 9, 192, 631, 770 periods of the radiation corresponding to the transition between the two hyperfine levels of the ground state of the cesium 133 atom.
Electric flow	Ampere	A	An ampere is that constant current which, if maintained in two straight parallel conductors of infinite length, of negligible circular cross-section, and placed 1 meter apart in a vacuum, would produce between these conductors a force equal to 2×10^{-7} Newtons per meter of length.
Thermodynamic temperature	Kelvin	K	A Kelvin is the fraction $\frac{1}{273.16}$ of the thermodynamic temperature of the triple point of water.
Amount of substance	Mole	mol	A mole is the amount of substance of a system that contains as many elementary particles ⁽¹⁾ or aggregations of elementary particles as there are atoms in 0.012 kilogram of carbon 12. When the mole is used, the elementary particles must be specified.
Luminous intensity	Candela	cd	A candela is the luminous intensity, in a given direction, of a source that emits monochromatic radiation of frequency 540×10^{12} hertz and that has a radiant intensity in that direction of $\frac{1}{683}$ watts per steradian.

Note ⁽¹⁾ The elementary particles here must be atoms, molecules, ions, electrons or other particles.

Table 2. Supplementary Units

Measure	Unit name	Unit symbol	Definition
Plane angle	Radian	rad	A radian is the plane angle between two radii of a circle that cuts off an arc on the circumference equal in length to the radius.
Solid angle	Steradian	sr	A steradian is the solid angle which, having its vertex in the center of a sphere, cuts off an area of the surface of the sphere equal to that of a square with sides equal in length to the radius of the sphere.

- (5) **Derived Units** Units expressed algebraically (with mathematical symbols such as multiplication and division signs) using base units and supplementary units are considered to be derived units. Derived units with special names and symbols are shown in **Table 3**.

Example: Examples of SI Derived Units Expressed in Terms of Base Units

Measure	Derived unit	
	Name	Symbol
Surface area	Square meter	m ²
Volume	Cubic meter	m ³
Speed	Meters per second	m/s
Acceleration	Meter per second per second	m/s ²
Wave numbers	Per meter	m ⁻¹
Density	Kilograms per cubic meter	kg/m ³
Current density	Amperes per square meter	A/m ²
Magnetic field strength	Amperes per meter	A/m
Concentration of substance	Moles per cubic meter	mol/m ³
Specific volume	Cubic meters per kilogram	m ³ /kg
Luminance	Candelas per square meter	cd/m ²

Table 3. SI Derived Units with Special Names and Symbols

Measure	Derived unit		Derivation from basic unit or supplementary unit, or derivation from another derived unit
	Name	Symbol	
Frequency	Hertz	Hz	1 Hz = 1 s ⁻¹
Force	Newton	N	1 N = 1 kg · m/s ²
Pressure, stress	Pascal	Pa	1 Pa = 1 N/m ²
Energy, work, heat quantity	Joule	J	1 J = 1 N · m
Work rate, process rate, power, electric power	Watt	W	1 W = 1 J/s
Electric charge, quantity of electricity	Coulomb	C	1 C = 1 A · s
Electric potential, potential difference, voltage, electromotive force	Volt	V	1 V = 1 J/C
Electrostatic capacity, capacitance	Farad	F	1 F = 1 C/V
Electric resistance	Ohm	Ω	1 Ω = 1 V/A
Conductance	Siemens	S	1 S = 1 Ω ⁻¹
Magnetic flux	Weber	Wb	1 Wb = 1 V · s
Magnetic flux density (magnetic induction)	Tesla	T	1 T = 1 Wb/m ²
Inductance	Henry	H	1 H = 1 Wb/A
Celsius temperature	Degrees Celsius or degrees	°C	1 t°C = (t+273.15) K
Luminous flux	Lumen	lm	1 lm = 1 cd · sr
Illumination	Lux	lx	1 lx = 1 lm/m ²
Radioactivity	Becquerel	Bq	1 Bq = 1 s ⁻¹
Absorbed dose	Gray	Gy	1 Gy = 1 J/kg
Dose equivalent	Sievert	Sv	1 Sv = 1 J/kg

1—3. Integer exponents of SI units

(1) **Prefixes** The multiples, prefix names, and prefix symbols that compose the integer exponents of 10 for SI units are shown in Table 4.

Table 4. Prefixes

Multiple of unit	Prefix		Multiple of unit	Prefix		Multiple of unit	Prefix	
	Name	Symbol		Name	Symbol		Name	Symbol
10 ¹⁸	Exa	E	10 ²	Hecto	h	10 ⁻⁹	Nano	n
10 ¹⁵	Peta	P	10	Deca	da	10 ⁻¹²	Pico	p
10 ¹²	Tera	T	10 ⁻¹	Deci	d	10 ⁻¹⁵	Femto	f
10 ⁹	Giga	G	10 ⁻²	Centi	c	10 ⁻¹⁸	Atto	a
10 ⁶	Mega	M	10 ⁻³	Milli	m			
10 ³	Kilo	k	10 ⁻⁶	Micro	μ			

2. Conversion table for conventional units that are difficult to convert to SI units

(The units enclosed by bold lines are the SI units.)

Force	N	dyn	kgf
	1	1×10 ⁵	1.019 72×10 ⁻¹
	1×10 ⁻⁵	1	1.019 72×10 ⁻⁶
	9.806 65	9.806 65×10 ⁵	1

Viscosity	Pa·s	cP	P
	1	1×10 ³	1×10
	1×10 ⁻³	1	1×10 ⁻²
	1×10 ⁻¹	1×10 ²	1

Note: 1P=1dyn·s/cm²=1g/cm·s
1Pa·s=1N·s/m², 1cP=1mPa·s

Stress	Pa or N/m²	MPa or N/mm²	kgf/mm ²	kgf/cm ²
	1	1×10 ⁻⁶	1.019 72×10 ⁻⁷	1.019 72×10 ⁻⁵
	1×10 ⁶	1	1.019 72×10 ⁻¹	1.019 72×10
	9.806 65×10 ⁶	9.806 65	1	1×10 ²
	9.806 65×10 ⁴	9.806 65×10 ⁻²	1×10 ⁻²	1

Kinematic viscosity	m²/s	cSt	St
	1	1×10 ⁶	1×10 ⁴
	1×10 ⁻⁶	1	1×10 ⁻²
	1×10 ⁻⁴	1×10 ²	1

Note: 1St=1cm²/s, 1cSt=1mm²/s

Note: 1Pa=1N/m², 1MPa=1N/mm²

Pressure	Pa	kPa	MPa	bar	kgf/cm ²	atm	mmH ₂ O	mmHg or Torr
	1	1×10 ⁻³	1×10 ⁻⁶	1×10 ⁻⁵	1.019 72×10 ⁻⁵	9.869 23×10 ⁻⁶	1.019 72×10 ⁻¹	7.500 62×10 ⁻³
	1×10 ³	1	1×10 ⁻³	1×10 ⁻²	1.019 72×10 ⁻²	9.869 23×10 ⁻³	1.019 72×10 ²	7.500 62
	1×10 ⁶	1×10 ³	1	1×10	1.019 72×10	9.869 23	1.019 72×10 ⁵	7.500 62×10 ³
	1×10 ⁵	1×10 ²	1×10 ⁻¹	1	1.019 72	9.869 23×10 ⁻¹	1.019 72×10 ⁴	7.500 62×10 ²
	9.806 65×10 ⁴	9.806 65×10	9.806 65×10 ⁻²	9.806 65×10 ⁻¹	1	9.678 41×10 ⁻¹	1×10 ⁴	7.355 59×10 ²
	1.013 25×10 ⁵	1.013 25×10 ²	1.013 25×10 ⁻¹	1.013 25	1.033 23	1	1.033 23×10 ⁴	7.600 00×10 ²
	9.806 65	9.806 65×10 ⁻³	9.806 65×10 ⁻⁶	9.806 65×10 ⁻⁵	1×10 ⁻⁴	9.678 41×10 ⁻⁵	1	7.355 59×10 ⁻²
	1.333 22×10 ²	1.333 22×10 ⁻¹	1.333 22×10 ⁻⁴	1.333 22×10 ⁻³	1.359 51×10 ⁻³	1.315 79×10 ⁻³	1.359 51×10	1

Note: 1Pa=1N/m²

Work, energy, heat quantity	J	kW·h	kgf·m	kcal
	1	2.777 78×10 ⁻⁷	1.019 72×10 ⁻¹	2.388 89×10 ⁻⁴
	3.600 ×10 ⁶	1	3.670 98×10 ⁵	8.600 0 ×10 ²
	9.806 65	2.724 07×10 ⁻⁶	1	2.342 70×10 ⁻³
	4.186 05×10 ³	1.162 79×10 ⁻³	4.268 58×10 ²	1

Note: 1J=1W·s, 1J=1N·m

Power, process rate/power, heat flow	W	kgf·m/s	PS	kcal/h
	1	1.019 72×10 ⁻¹	1.359 62×10 ⁻³	8.600 0 ×10 ⁻¹
	9.806 65	1	1.333 33×10 ⁻²	8.433 71
	7.355 ×10 ²	7.5 ×10	1	6.325 29×10 ²
1.162 79	1.185 72×10 ⁻¹	1.580 95×10 ⁻³	1	

Note: 1W=1J/s, PS: French horsepower

Thermal conductivity	W/(m·K)	kcal/(m·h·°C)
	1	8.600 0×10 ⁻¹
	1.162 79	1

Coefficient of heat transfer	W/(m²·K)	kcal/(m ² ·h·°C)
	1	8.600 0×10 ⁻¹
	1.162 79	1

Specific heat	J/(kg·K)	kcal/(kg·°C) cal/(g·°C)
	1	2.388 89×10 ⁻⁴
	4.186 05×10 ⁻³	1

Heat Treatment for Steel Materials

Name	Vickers hardness (HV)	Hardening depth (mm)	Strain	Applicable materials	Typical materials	Remarks
Through hardening	Max. 750	All	Varies according to the material.	High-C steel C > 0.45%	SKS3 SKS21 SUJ2 SKH51 SKS93 SK4 S45C	<ul style="list-style-type: none"> Should not be used for long parts such as spindles or for precision parts.
Carburizing	Max. 750	Standard 0.5 Max. 2	Medium	Low-C steel C < 0.3%	SCM415 SNCM220	<ul style="list-style-type: none"> Localized hardening is possible. Hardening depth must be specified on drawings. Suitable for precision parts
Induction hardening	Max. 500	1~2	Large	Medium-C steel C 0.3~0.5%	S45C	<ul style="list-style-type: none"> Localized hardening is possible. Expensive in small volumes Good fatigue resistance
Nitriding	900~1000	0.003~0.008	Small	Nitriding steel	SACM645	<ul style="list-style-type: none"> Highest hardening hardness Suitable for precision parts Suitable for sliding bearing spindles
Tufftride®	Carbon steel 500 SUS 1000	0.01~0.02	Small	Steel materials	S45C SCM415 SK3 Stainless steel	<ul style="list-style-type: none"> Good fatigue resistance and wear resistance Same corrosion resistance as zinc plating Not suitable for precision parts because polishing following the heat treatment is not possible. Suitable for oil-free lubrication
Bluing				Wire rod	SWP—B	<ul style="list-style-type: none"> Low temperature annealing Enhances elasticity by removing internal stress during forming

Hardness Test Methods and Applicable Parts

Test method	Principle	Applicable heat-treated parts	Characteristics	Remarks
1. Brinell hardness	<ul style="list-style-type: none"> A ball indenter (steel or carbide alloy) is used to indent the test surface. Hardness is given by dividing the test load by the surface area, which was found from the diameter of the indentation. 	<ul style="list-style-type: none"> Annealed parts Normalized parts Anchored materials 	<ol style="list-style-type: none"> Suitable for uneven materials and forged products because the indent is large. Not suitable for small or thin specimens 	JIS Z 2243
2. Rockwell hardness	<ul style="list-style-type: none"> The standard or test load is applied via a diamond or ball indenter, and the hardness value is read from the tester. 	<ul style="list-style-type: none"> Hardened parts and tempered parts Carburized surfaces Nitrided surfaces Thin sheets of copper, brass, bronze, or similar materials ※ Rockwell C scale (HRC) is not suitable for materials such as narrow pins and thin sheets. 	<ol style="list-style-type: none"> Hardness value can be obtained quickly. Suitable as an intermediate test of actual products Caution is required because there are many types. <p>※ There are many types of Rockwell hardness testers, including the A scale (HRA), B scale (HRB), C scale (HRC), and D scale (HRD).</p>	JIS Z 2245
3. Shore hardness	<ul style="list-style-type: none"> The specimen is set on a table and a hammer is dropped from a set height. Hardness is determined based on how high the hammer bounces. 	<ul style="list-style-type: none"> Hardened parts and tempered parts Nitrided parts Large parts treated by carburizing or similar process 	<ol style="list-style-type: none"> Extremely easy to operate. Data can be obtained quickly. Suitable for large parts Because indent is small and not noticeable, this test is suitable for actual products. Compact and light-weight. Portable. 	JIS Z 2246
4. Vickers hardness	<ul style="list-style-type: none"> A diamond square pyramid indenter with a vertex angle of 136 degrees is used to create an indentation in the test surface. The hardness value is found from the test load and the surface area of the indent, computed from the length of the diagonal lines of the indent. (Conversion is performed automatically.) 	<ul style="list-style-type: none"> Materials with a thin hardened layer created by induction hardening, carburizing, nitriding, electroplating, ceramic coating, etc. Hardened layer depth in carburized and nitrided parts 	<ol style="list-style-type: none"> Suitable for small and thin specimens Because the indenter is diamond, this test can be used with materials of any hardness. 	JIS Z 2244

Approximate Conversion Values for Rockwell C Hardness Values of Steel ⁽¹⁾

(HRC) Rockwell C scale hardness	(HV) Vickers hardness	Brinell hardness (HB) 10 mm ball Load 3000 kgf		Rockwell Hardness ⁽³⁾			Rockwell superficial hardness Diamond conical indenter			(Hs) Shore hardness	Tensile strength (approximate value) MPa (kgf/mm ²) ⁽²⁾	Rockwell C scale hardness ⁽³⁾
		Standard ball	Tungsten carbide ball	(HRA) A scale Load 60kgf Diamond conical indenter	(HRB) B scale Load 100kgf Dia. 1.6mm (1/16 in.) ball	(HRD) D scale Load 100kgf Diamond conical indenter	15—N scale Load 15kgf	30—N scale Load 30kgf	45—N scale Load 45kgf			
68	940	—	—	85.6	—	76.9	93.2	84.4	75.4	97	—	68
67	900	—	—	85.0	—	76.1	92.9	83.6	74.2	95	—	67
66	865	—	—	84.5	—	75.4	92.5	82.8	73.3	92	—	66
65	832	—	(739)	83.9	—	74.5	92.2	81.9	72.0	91	—	65
64	800	—	(722)	83.4	—	73.8	91.8	81.1	71.0	88	—	64
63	772	—	(705)	82.8	—	73.0	91.4	80.1	69.9	87	—	63
62	746	—	(688)	82.3	—	72.2	91.1	79.3	68.8	85	—	62
61	720	—	(670)	81.8	—	71.5	90.7	78.4	67.7	83	—	61
60	697	—	(654)	81.2	—	70.7	90.2	77.5	66.6	81	—	60
59	674	—	(634)	80.7	—	69.9	89.8	76.6	65.5	80	—	59
58	653	—	615	80.1	—	69.2	89.3	75.7	64.3	78	—	58
57	633	—	595	79.6	—	68.5	88.9	74.8	63.2	76	—	57
56	613	—	577	79.0	—	67.7	88.3	73.9	62.0	75	—	56
55	595	—	560	78.5	—	66.9	87.9	73.0	60.9	74	2075 (212)	55
54	577	—	543	78.0	—	66.1	87.4	72.0	59.8	72	2015 (205)	54
53	560	—	525	77.4	—	65.4	86.9	71.2	58.6	71	1950 (199)	53
52	544	(500)	512	76.8	—	64.6	86.4	70.2	57.4	69	1880 (192)	52
51	528	(487)	496	76.3	—	63.8	85.9	69.4	56.1	68	1820 (186)	51
50	513	(475)	481	75.9	—	63.1	85.5	68.5	55.0	67	1760 (179)	50
49	498	(464)	469	75.2	—	62.1	85.0	67.6	53.8	66	1695 (173)	49
48	484	451	455	74.7	—	61.4	84.5	66.7	52.5	64	1635 (167)	48
47	471	442	443	74.1	—	60.8	83.9	65.8	51.4	63	1580 (161)	47
46	458	432	432	73.6	—	60.0	83.5	64.8	50.3	62	1530 (156)	46
45	446	421	421	73.1	—	59.2	83.0	64.0	49.0	60	1480 (151)	45
44	434	409	409	72.5	—	58.5	82.5	63.1	47.8	58	1435 (146)	44
43	423	400	400	72.0	—	57.7	82.0	62.2	46.7	57	1385 (141)	43
42	412	390	390	71.5	—	56.9	81.5	61.3	45.5	56	1340 (136)	42
41	402	381	381	70.9	—	56.2	80.9	60.4	44.3	55	1295 (132)	41
40	392	371	371	70.4	—	55.4	80.4	59.5	43.1	54	1250 (127)	40
39	382	362	362	69.9	—	54.6	79.9	58.6	41.9	52	1215 (124)	39
38	372	353	353	69.4	—	53.8	79.4	57.7	40.8	51	1180 (120)	38
37	363	344	344	68.9	—	53.1	78.8	56.8	39.6	50	1160 (118)	37
36	354	336	336	68.4	(109.0)	52.3	78.3	55.9	38.4	49	1115 (114)	36
35	345	327	327	67.9	(108.5)	51.5	77.7	55.0	37.2	48	1080 (110)	35
34	336	319	319	67.4	(108.0)	50.8	77.2	54.2	36.1	47	1055 (108)	34
33	327	311	311	66.8	(107.5)	50.0	76.6	53.3	34.9	46	1025 (105)	33
32	318	301	301	66.3	(107.0)	49.2	76.1	52.1	33.7	44	1000 (102)	32
31	310	294	294	65.8	(106.0)	48.4	75.6	51.3	32.7	43	980 (100)	31
30	302	286	286	65.3	(105.5)	47.7	75.0	50.4	31.3	42	950 (97)	30
29	294	279	279	64.7	(104.5)	47.0	74.5	49.5	30.1	41	930 (95)	29
28	286	271	271	64.3	(104.0)	46.1	73.9	48.6	28.9	41	910 (93)	28
27	279	264	264	63.8	(103.0)	45.2	73.3	47.7	27.8	40	880 (90)	27
26	272	258	258	63.3	(102.5)	44.6	72.8	46.8	26.7	38	860 (88)	26
25	266	253	253	62.8	(101.5)	43.8	72.2	45.9	25.5	38	840 (86)	25
24	260	247	247	62.4	(101.0)	43.1	71.6	45.0	24.3	37	825 (84)	24
23	254	243	243	62.0	100.0	42.1	71.0	44.0	23.1	36	805 (82)	23
22	248	237	237	61.5	99.0	41.6	70.5	43.2	22.0	35	785 (80)	22
21	243	231	231	61.0	98.5	40.9	69.9	42.3	20.7	35	770 (79)	21
20	238	226	226	60.5	97.8	40.1	69.4	41.5	19.6	34	760 (77)	20
(18)	230	219	219	—	96.7	—	—	—	—	33	730 (75)	(18)
(16)	222	212	212	—	95.5	—	—	—	—	32	705 (72)	(16)
(14)	213	203	203	—	93.9	—	—	—	—	31	675 (69)	(14)
(12)	204	194	194	—	92.3	—	—	—	—	29	650 (66)	(12)
(10)	196	187	187	—	90.7	—	—	—	—	28	620 (63)	(10)
(8)	188	179	179	—	89.5	—	—	—	—	27	600 (61)	(8)
(6)	180	171	171	—	87.1	—	—	—	—	26	580 (59)	(6)
(4)	173	165	165	—	85.5	—	—	—	—	25	550 (56)	(4)
(2)	166	158	158	—	83.5	—	—	—	—	24	530 (54)	(2)
(0)	160	152	152	—	81.7	—	—	—	—	24	515 (53)	(0)

Note ⁽¹⁾: Figures in blue are based on ASTM E 140, Table 1 (Jointly prepared by SAE, ASM and ASTM.)

⁽²⁾: The units and figures shown in parentheses () following the listed value are the results of conversion from PSI figures by reference to JIS Z 8413 and Z8438 conversion tables.
1MPa = 1N/mm²

⁽³⁾: The figures in parentheses () are in ranges not frequently used. They are given as reference data.

Varieties of Surface Roughness

The definitions and notation are prescribed for the parameters which indicate the surface roughness of an industrial product, including the arithmetic average roughness (Ra), maximum height (Ry), 10-spot average roughness (Rz), average concave-to-convex distance (Sm), average distance between local peaks (S), and load length rate (tp). Surface roughness is the arithmetic average of values at randomly selected spots on the surface of an object.

[Center-line average roughness (Raz) is defined in the supplements to JIS B 0031 and JIS B 0601.]

Typical calculations of surface roughness

<p>Arithmetical average roughness (Ra)</p> <p>A portion stretching over a reference length in the direction in which the average line extends is cut out from the roughness curve. This portion is presented in a new graph with the X axis extending in the same direction as the average line and the Y axis representing the magnitude. When the roughness curve is represented by $y=f(x)$, Ra is the value in microns (μm) found from the formula shown at right.</p>	$Ra = \frac{1}{l} \int_0^l f(x) dx$
<p>Maximum height (Ry)</p> <p>A portion stretching over a reference length in the direction in which the average line extends is cut out from the roughness curve. The gap between the peak line and valley line in this portion is measured in the direction of the magnitude axis, and this value is indicated in microns (μm).</p> <p>Note: When finding Ry, the reference length is selected from a portion which contains no abnormally high peaks or abnormally low valleys (locations which are likely flaws).</p>	$Ry = Rp + Rv$
<p>Ten-spot average roughness (Rz)</p> <p>A portion stretching over a reference length in the direction in which the average line extends is cut out from the roughness curve. Within this portion, the average absolute value of the height (Yp) of the five highest peaks as measured from the average line and the average absolute value of the height (Yv) of the five lowest valleys are added together. Rz is this sum, in microns (μm).</p>	$Rz = \frac{ Yp1 + Yp2 + Yp3 + Yp4 + Yp5 + Yv1 + Yv2 + Yv3 + Yv4 + Yv5 }{5}$ <p>Yp1, Yp2, Yp3, Yp4, Yp5 : Heights of the top five peaks within the sampled portion of reference length l</p> <p>Yv1, Yv2, Yv3, Yv4, Yv5 : Heights of the five lowest valleys within the sampled portion of reference length l</p>

Reference: Relationship Between Arithmetic Average Roughness (Ra) and Previous Notation

Arithmetical average roughness Ra		Drawing indication of surface texture	Max. height Ry	Ten-spot average roughness Rz	Ry - Rz reference length l (mm)	Conventional finishing symbol
Standard sequence	Cut-off value λc (mm)		Standard sequence	Standard sequence		
0.012 a	0.08		0.05 s	0.05 z	0.08	
0.025 a			0.1 s	0.1 z		
0.05 a			0.2 s	0.2 z		
0.1 a			0.4 s	0.4 z		
0.2 a			0.8 s	0.8 z		
0.4 a	0.8		1.6 s	1.6 z	0.8	
0.8 a			3.2 s	3.2 z		
1.6 a			6.3 s	6.3 z		
3.2 a	2.5		12.5 s	12.5 z	2.5	
6.3 a			25 s	25 z		
12.5 a	8		50 s	50 z	8	
25 a			100 s	100 z		
50 a	—		200 s	200 z	—	
100 a			400 s	400 z		


※The relationships among the three varieties shown here are not precise, and are presented for convenience only.

※Ra: The evaluation lengths of Ry and Rz are the cut-off values and the reference length each multiplied by five.

Position of Auxiliary Symbols for Surface Symbols

An auxiliary symbol indicating a surface roughness value, cut-off value or reference length, machining method, grain direction, surface undulation, etc. is placed around the surface symbol as shown in Fig. 1.

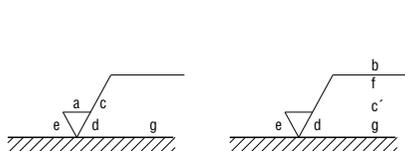Fig. 1 Positions of Auxiliary Symbols




- a: Ra value
- b: Machining method
- c: Cutoff value-Evaluation length
- c': Reference length-Evaluation length
- d: Grain direction
- f: Parameter other than Ra (when tp, this is parameter / cutoff level)
- g: Surface undulation (according to JIS B 0610)

Remark : Symbols other than a and f shall be entered when needed.

Reference : In ISO 1302, a finish allowance is entered at the location of e in Figure 1.















Symbol	Meaning	Diagram
=	Direction of grains left by the cutting instrument are parallel to the projection plane of the drawing where the symbol is entered. Example: Shaped surface	
⊥	Direction of grains left by the cutting instrument are perpendicular to the projection plane of the drawing where the symbol is entered. Examples: Shaped surface (side view), circular cut, cylindrical cut	
X	Direction of grains left by the cutting instrument intersect in 2 directions at angles to the projection plane of the drawing where the symbol is entered. Example: Honed surface	
M	Direction of grains left by the cutting instrument intersect in multiple directions or have no direction. Examples: Lapped surface, superfinished surface, and surface finished by front milling or end milling with cross feed	
C	Grains left by the cutting instrument are virtually concentric around the center of the projection plane of the drawing where the symbol is entered. Example: Facing surface	
R	Grains left by the cutting instrument are virtually radial with respect to the center of the projection plane of the drawing where the symbol is entered.	

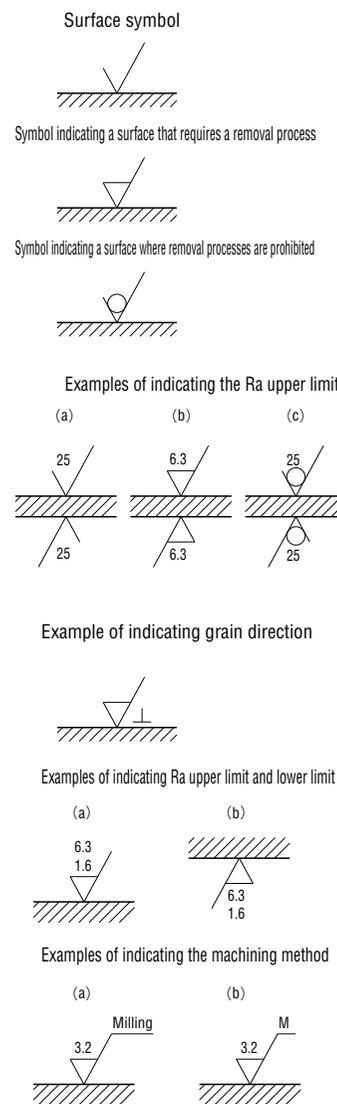Examples of surface symbols



Arithmetic average roughness Ra		0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50	100		
Conventional notation for surface roughness	Max. height Rmax.	0.1 -S	0.2 -S	0.4 -S	0.8 -S	1.6 -S	3.2 -S	6.3 -S	12.5 -S	25 -S	50 -S	100 -S	200 -S	400 -S		
	Standard value of reference length (mm)	0.25				0.8			2.5		8		25			
	Finishing symbol	▽▽▽▽				▽▽▽			▽▽		▽		—			
Machining methods	Forging								Fine							
	Casting								Fine							
	Die casting															
	Hot rolling															
	Cold rolling															
	Drawing															
	Extruding															
	Tumbling															
	Sandblasting															
	Rolling															
	Front milling								Fine							
	Planing															
	Carving (including slotting)															
	Milling								Fine							
	Precision boring															
	Filing								Fine							
	Round grinding								Fine		High		Medium		Rough	
	Boring								Fine							
	Drilling															
	Reaming								Fine							
	Broach grinding								Fine							
	Shaving															
	Grinding								Fine		High		Medium		Rough	
	Hone finishing								Fine							
	Super finishing								Fine							
	Buffing								Fine							
	Paper finishing								Fine							
	Lapping								Fine							
	Liquid honing								Fine							
	Burnishing															
Surface rolling																
Electric discharge carving																
WEDM (Wire electric discharge machining)																
Chemical polishing								Fine								
Electrolytic abrasion								Fine								

Types and symbols of geometrical tolerances

Type of tolerance	Symbol	Definition of tolerance range	Examples of drawings and their interpretations
Shape tolerances	Straightness tolerance	 If the symbol ϕ is attached before the numerical value that indicates the tolerance range, this tolerance range is the range within a cylinder of diameter t .	 If a tolerance frame is connected to a dimension that indicates the diameter of a cylinder, the axis line of the cylinder shall be contained within a cylinder of 0.08mm diameter.
	Flatness tolerance	 The tolerance range is the area between two parallel planes separated by distance t .	 This surface shall be contained within two parallel planes separated by 0.08mm.
	Circularity tolerance	 The tolerance range in the considered plane is the area between two concentric circles separated by distance t .	 The circumference in any section normal to the axis shall be contained between two concentric circles separated by 0.1mm on the same plane.
	Cylindricity tolerance	 The tolerance range is the range contained between two coaxial cylinder surfaces separated by distance t .	 The considered surface shall be contained between two coaxial cylinder surfaces separated by 0.1mm.
	Profile tolerance of line	 The tolerance range is the range contained between the two envelope curves formed by a circle with diameter t , the center of which is situated on the theoretically correct profile curve.	 In any cross-section parallel to the projection plane, the considered profile shall be contained between the two envelope curves formed by a 0.04mm diameter circle, the center of which is situated on the theoretically correct profile curve.
	Profile tolerance of surface	 The tolerance range is the range contained between the two enveloping surfaces formed by a sphere with diameter t , the center of which is situated on the theoretically correct profile surface.	 The considered surface shall be contained between the two enveloping surfaces formed by a 0.02mm diameter sphere, the center of which is situated on the surface containing the theoretically correct profile.
Orientation tolerances	Parallelism tolerance	 The tolerance range is the range contained between two planes parallel to the datum plane and separated by distance t .	 The surface shown by the arrow of the indicator line shall be contained between two planes parallel to the datum plane A and separated by 0.01mm in the direction of the arrow of the indicator line.
	Perpendicularity tolerance	 If symbol ϕ is attached before the numerical value indicating the tolerance range, this tolerance range is the range contained within a cylinder of diameter t that is perpendicular to the datum plane.	 The axis of the cylinder shown by the arrow of the indicator line shall be contained within a cylinder of diameter 0.01mm that is perpendicular to the datum plane A.
	Angularity tolerance	 The tolerance range is the range contained between two parallel planes inclined at a specified angle to the datum plane and separated from each other by distance t .	 The surface shown by the arrow of the indicator line shall be contained between two parallel planes which are inclined with theoretical exactness by 40 degrees to the datum plane A, and which are separated by 0.08mm in the direction of the arrow of the leader line.
Positional tolerances	Positional tolerance	 The tolerance range is the range contained within a circle or sphere of diameter t with its center situated at the theoretically exact location of the considered point (hereafter referred to as the "true location").	 The point shown by the indicator line shall be contained within a 0.03mm diameter circle with its center situated at the true location 60mm from datum line A and 100mm from datum line B.
	Coaxiality tolerance or concentricity tolerance	 If symbol ϕ is attached before the numerical value that indicates the tolerance, the tolerance range is the range within a cylinder of diameter t whose axis matches the datum axis line.	 The axis of the cylinder shown by the arrow of the indicator line shall be contained within a cylinder of diameter 0.01mm whose axis matches datum axis line A.
	Symmetry	 The tolerance range is the range contained between two parallel planes separated by distance t and arranged symmetrically with respect to the datum center plane.	 The center plane shown by the arrow of the indicator line shall be contained between two parallel planes separated by 0.08mm and arranged symmetrically with respect to the datum center plane A.
Run-out tolerances	Circular run-out tolerance	 The tolerance range is the range contained between two concentric circles separated in the axial direction by distance t and the centers of which are situated on the datum axis line on any measuring plane normal to the datum axis line.	 The radial run-out of the cylinder surface shown by the arrow of the indicator line shall not exceed 0.1mm on any measuring plane normal to the datum axis line when the cylinder is rotated by one rotation about the datum axis line A-B.
	Total run-out tolerance	 The tolerance range is the range contained between two coaxial cylinders having axes agreeing with the datum axis line and separated from each other by distance t in the radial direction.	 The total radial run-out of the cylinder surface shown by the arrow of the indicator line shall not exceed 0.1mm at any point on the cylinder surface when the cylindrical part is rotated about the datum axis line A-B.

The meanings of the lines used in the drawings in the "definition of tolerance range" column are as follows.
 Thick solid or broken line: Shape Thin dash-dot line: Center line Thick dash-dot line: Datum
 Thin alternating long and two short dashes line: Supplementary projection plane or section plane Thin solid or broken line: Tolerance range
 Thick alternating long and two short dashes line: Projection of shape onto supplementary plane or section plane

TECHNICAL DATA

		H6	H7	H8	H9	Applicable part	Functional classification	Application example
Parts can move relative to each other.	Clearance fit					Part which accommodates a particularly wide gap, or a moving part which requires a gap Part which accommodates a wide gap to facilitate assembly Part which requires an appropriate gap even at high temperatures	Part which for functional reasons requires a large gap { Expands. Large positional error. Long fitting length Cost needs to be reduced. Manufacturing cost Maintenance cost	Piston ring and piston ring groove Fitting by means of a loose set pin Crank web and pin bearing (side) Exhaust valve box and spring bearing sliding part Piston ring and piston ring groove
						Part which accommodates a wide gap, or which requires a wide gap		
Parts cannot move relative to each other.	Interference fit					Part which accommodates a fairly wide gap, or a moving part which requires a gap Fairly wide gap and well lubricated bearing Bearing subjected to high temperature, high speed, and high load (high-degree forced lubrication)	Regular rotating or sliding part (Must be well lubricated.) Regular fitting part (is often disassembled)	Fitting of exhaust valve seat Main bearing for crankshaft Regular sliding part stripper bolt MSB (e9) Part where a cooled exhaust valve box is inserted Regular shaft and bushing Link device lever and bushing
						Fitting which provides an appropriate clearance and permits movement (high-quality fitting). Regular normal-temperature bearing lubricated with grease or oil		
	Roll fit	t6	f7	f7	f8	Continuously rotating part of a precision machine under light load Fitting with a narrow gap and which permits movement (spigot, positioning) High-precision sliding part	Part requiring precision motion with almost no gap	Link device pin and lever Key and key groove Precision control valve rod Guide lifter pin (g6)
	Tight roll fit	g5	g6			Fitting which allows movement by hand when a lubricant is used (high-quality positioning) Special high-precision sliding part Unimportant stationary part		Fitting of rim and boss Fitting of gears in a precision gear device Dowel pin MSTH (h7)
	Sliding fit	h5	h6	h7	h8	Installation part which is compatible with a very small tightening interference High-precision positioning which locks both parts in place while unit is in use Fitting which can be assembled/disassembled using a wooden or lead hammer		Fitting two coupling flanges Governor path and pin Fitting of gear rim and boss
	Push fit	h5	h6	h5	h6	Fitting which requires an iron hammer or hand press for assembly/disassembly (A key or other device is required in order to prevent inter-part shaft rotation.) Precision positioning	Difficult to disassemble without damaging the part.	Fitting of gear pump shaft and casing Reamer bolt
	Striking	js5	k6			Assembly/disassembly are the same as the above. Precision positioning which permits no gap at all		Reamer bolt Dowel pin MSTM (m6) Fastening of hydraulic device pistons and shafts Fitting of coupling flange and shaft
	Striking	k5	m6			Fitting which requires considerable force for assembly/disassembly Precision stationary fitting (A key or other device is required for high-torque transmission purposes.)		Fitting of flexible shaft coupling and gear (passive side) Precision fitting Punch SPAS, etc. (m5) Insertion of suction valve and valve guide Die MHD, etc. (m5)
	Light press fit	m5	n6			Fitting which requires large force for assembly/disassembly (A key or other device is required for high-torque transmission purposes.) However, only light press-fitting force is required for press-fitting when both parts are non-ferrous parts. Fastened using the standard press-fitting for fastening a ferrous part to a ferrous, bronze, or copper part	Fitting force alone is sufficient for transmitting small force	Insertion of suction valve and valve guide Straight die MSD, etc. (r6) Fixing a gear and shaft together (small torque) Dowel pin MST, (p6) Flexible coupling shaft and gear (drive side)
	Press fit	n5	p6			Assembly/disassembly are the same as the above. Shrinkage press fitting, cold press fitting or forced press fitting is required for large parts	Difficult to disassemble without damaging the part.	Coupling and shaft
	Press fit, cold press fit, shrinkage press fit, cold press fit	p5	r6			Permanent assembly in which parts are both tightly fastened together and will not be disassembled, and which requires shrinkage press fitting, cold press fitting, or forced press fitting. For light alloys, only ordinary press fitting is required.	Fitting force is capable of transmitting considerable force	Fitting and fixing a bearing bushing Insertion of suction valve and valve seat Fixing a coupling flange and shaft together (large torque) Fixing a drive gear rim and boss together Fitting and fixing a bearing bushing
		r5	s6					
		t6	u6					
		u6	x6					

⚠ The items printed in red in the Application example are press die parts presented in this catalog.

2.1 Fitting with regularly used shaft adopted as reference

Reference shaft	Hole tolerance range class					
	Clearance fit		Transition fit		Close fit	
h5		H6 JS6 K6 M6		N6 *		P6
h6		F6 G6 H6 JS6 K6 M6		N6		P6 *
h7		F7 G7 H7 JS7 K7 M7		N7		P7 *
h8		F8 G8 H8 JS8 K8 M8		N8		P8 *
h9		F9 G9 H9 JS9 K9 M9		N9		P9 *
		B10 C10 D10				


Note: * Exceptions for these fittings may arise depending on the dimensional sectioning scheme.

1.1 Fitting with regularly used hole adopted as reference

Reference hole	Shaft tolerance range class					
	Clearance fit		Transition fit		Close fit	
H6	g5 g6 h6 js6 k6 m6	h5 js5 k5 m5				p6 *
H7	e7 f7 g7 h7 js7 k7 m7	h6 js6 k6 m6				p6 *
H8	e8 f8 g8 h8 js8 k8 m8	h7 js7 k7 m7				p7 *
H9	e9 f9 g9 h9 js9 k9 m9	h8 js8 k8 m8				p8 *
H10	e10 f10 g10 h10 js10 k10 m10	h9 js9 k9 m9				p9 *


Note: * Exceptions for these fittings may arise depending on the dimensional sectioning scheme.

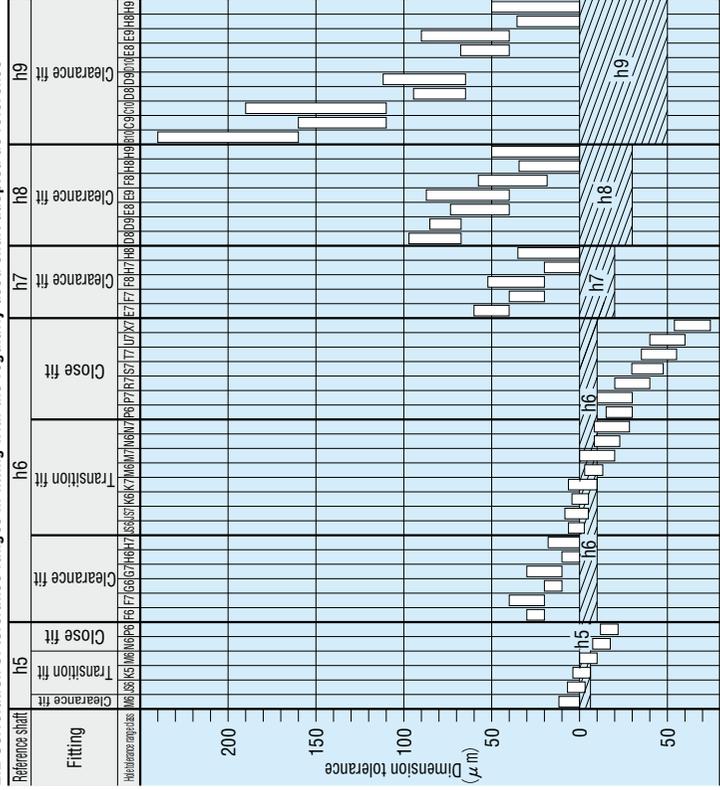2.2 Correlation of tolerance ranges in fitting with the regularly used shaft adopted as reference



* Cases in which the measurement exceeds the reference dimension in the above table (18mm) but does not exceed 30mm.

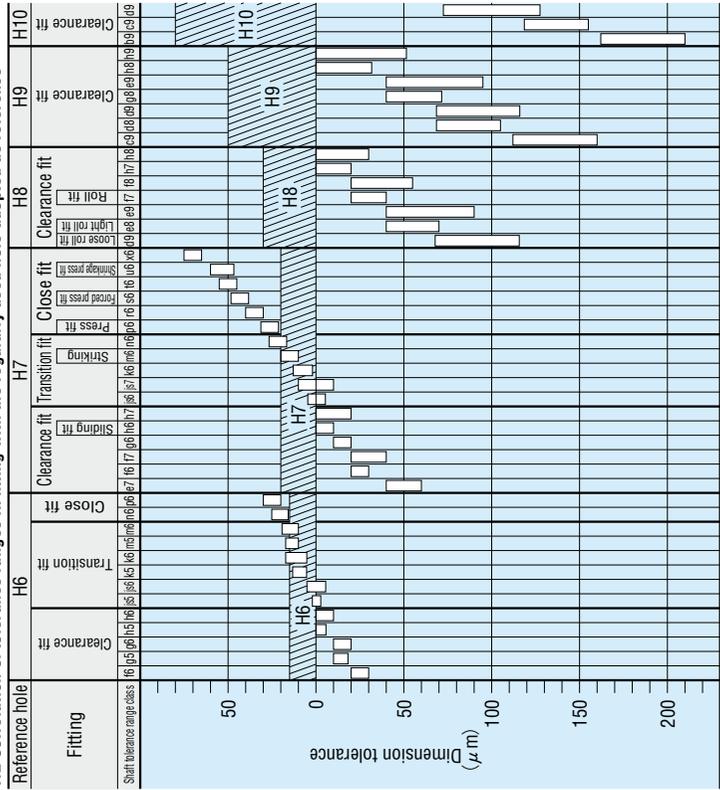1.2 Correlation of tolerance ranges in fitting with the regularly used hole adopted as reference



* Cases in which the measurement exceeds the reference dimension in the above table (18mm) but does not exceed 30mm.

Hole tolerance range class

Standard dimension (mm)	Hole tolerance range class																				Units: μ m											
	B10	C9	C10	D8	D9	D10	E7	E8	E9	F6	F7	F8	G6	G7	H6	H7	H8	H9	H10	JS7	K6	K7	M6	M7	N6	N7	P6	P7	R7	S7	T7	U7
3	+180	+85	+100	+34	+45	+60	+24	+28	+39	+12	+16	+20	+8	+12	+6	+10	+14	+25	+40	± 3	0	0	-2	-2	-4	-4	-6	-10	-14	-18	-20	
6	+188	+100	+118	+48	+60	+78	+32	+38	+50	+18	+22	+28	+12	+16	+8	+12	+18	+30	+48	± 4	+2	+3	-1	0	-5	-4	-9	-8	-11	-15	-19	-24
10	+208	+116	+138	+62	+76	+98	+40	+47	+61	+22	+28	+35	+14	+20	+9	+15	+22	+36	+58	± 4.5	+2	+5	-3	0	-7	-4	-12	-9	-13	-17	-22	-28
14	+220	+138	+165	+77	+93	+120	+50	+59	+75	+27	+34	+43	+17	+24	+11	+18	+27	+43	+70	± 5.5	+2	+6	-4	0	-9	-5	-15	-11	-16	-21	-26	-31
18	+244	+162	+194	+98	+117	+149	+61	+73	+92	+33	+41	+53	+20	+28	+13	+21	+33	+52	+84	± 6.5	+2	+6	-4	0	-11	-7	-18	-14	-20	-27	-33	-40
24	+270	+182	+220	+119	+142	+180	+75	+89	+112	+41	+50	+64	+25	+34	+16	+25	+39	+62	+100	± 8	+3	+7	-4	0	-12	-8	-21	-17	-25	-34	-44	-51
30	+300	+214	+260	+146	+174	+220	+90	+106	+134	+49	+60	+76	+29	+40	+19	+30	+46	+74	+120	± 9.5	+4	+9	-5	0	-14	-9	-26	-21	-30	-41	-51	-61
40	+330	+224	+270	+166	+200	+250	+100	+120	+150	+60	+80	+100	+30	+40	+20	+30	+40	+50	+70	± 11	+4	+10	-6	0	-16	-10	-30	-24	-33	-45	-59	-76
50	+360	+257	+310	+174	+207	+260	+107	+126	+159	+58	+71	+90	+34	+47	+22	+35	+54	+87	+140	± 12.5	+4	+12	-8	0	-20	-12	-36	-28	-38	-51	-68	-88
65	+400	+280	+340	+190	+230	+290	+120	+140	+170	+72	+88	+108	+36	+50	+25	+40	+63	+100	+160	± 15	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
80	+440	+310	+370	+208	+245	+305	+125	+148	+185	+68	+83	+106	+39	+54	+25	+40	+63	+100	+160	± 17	+4	+12	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
100	+480	+340	+410	+220	+260	+320	+140	+160	+200	+85	+100	+120	+40	+55	+28	+43	+68	+115	+185	± 20	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
120	+525	+385	+465	+230	+270	+330	+150	+170	+210	+95	+110	+130	+45	+60	+30	+45	+70	+120	+180	± 23	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
140	+565	+405	+495	+240	+280	+340	+160	+180	+220	+105	+120	+140	+50	+65	+35	+50	+75	+125	+195	± 26	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
160	+605	+435	+535	+250	+290	+350	+170	+190	+230	+115	+130	+150	+55	+70	+40	+55	+80	+130	+200	± 28	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
180	+650	+465	+575	+260	+300	+360	+180	+200	+240	+125	+140	+160	+60	+75	+45	+60	+85	+135	+210	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
200	+700	+500	+625	+270	+310	+370	+190	+210	+250	+135	+150	+170	+65	+80	+50	+65	+90	+140	+220	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
225	+750	+535	+675	+280	+320	+380	+200	+220	+260	+145	+160	+180	+70	+85	+55	+70	+95	+145	+230	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
250	+800	+575	+725	+290	+330	+390	+210	+230	+270	+155	+170	+190	+75	+90	+60	+75	+100	+150	+240	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
280	+850	+615	+775	+300	+340	+400	+220	+240	+280	+165	+180	+200	+80	+95	+65	+80	+105	+155	+250	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
315	+900	+655	+825	+310	+350	+410	+230	+250	+290	+175	+190	+210	+85	+100	+70	+85	+110	+160	+260	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
355	+950	+695	+875	+320	+360	+420	+240	+260	+300	+185	+200	+220	+90	+105	+75	+90	+115	+165	+270	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
400	+1000	+735	+925	+330	+370	+430	+250	+270	+310	+195	+210	+230	+95	+110	+80	+95	+120	+170	+280	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
450	+1050	+775	+975	+340	+380	+440	+260	+280	+320	+205	+220	+240	+100	+115	+85	+100	+125	+175	+290	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106
500	+1100	+815	+1025	+350	+390	+450	+270	+290	+330	+215	+230	+250	+105	+120	+90	+105	+130	+180	+300	± 31	+5	+13	-8	0	-22	-14	-41	-33	-45	-61	-81	-106

Note: In each column, the upper figure is the upper dimensional tolerance, and the lower figure is the lower dimensional tolerance.

Dimensional tolerances for regularly used fitting shaft

Standard dimension (mm)	Shaft tolerance range class																				Units: μm									
	b9	c9	d8	d9	e7	e8	e9	f6	g6	h4 *	h5	h6	h7	h8	h9	js5	js6	js7	k5	k6		m5	m6	n5 *	n6	p6	r6	s6	t6	u6
3	-140	-60	-20	-20	-14	-14	-14	-6	-6	-2	0	0	0	0	0	0	±2	±3	±5	+4	+6	+5	+8	+8	+10	+12	+16	+20	+24	+26
3	-165	-85	-34	-45	-24	-28	-39	-12	-16	-20	-6	-8	-10	-14	-25	±3	±4	±5	0	0	+2	+2	+4	+4	+4	+6	+10	+18	+20	
6	-140	-70	-30	-30	-20	-20	-20	-10	-10	-10	-4	-4	0	0	0	±2.5	±4	±6	+6	+9	+9	+12	+13	+16	+20	+23	+27	+31	+36	
6	-170	-100	-48	-60	-32	-38	-50	-18	-22	-28	-12	-4	-5	-8	-12	-30	±4	±6	+1	+1	+4	+4	+8	+8	+8	+12	+15	+19	+23	+28
10	-150	-80	-40	-40	-25	-25	-25	-13	-13	-13	-5	-5	0	0	0	±3	±4.5	±7	+7	+10	+12	+15	+16	+19	+24	+28	+32	+37	+43	
10	-186	-116	-62	-76	-40	-47	-61	-22	-28	-35	-11	-14	-4	-6	-9	-36	±3	±4.5	±7	+1	+1	+6	+6	+10	+15	+19	+23	+28	+34	+51
14	-150	-95	-50	-50	-32	-32	-32	-16	-16	-16	-6	-6	0	0	0	±4	±5.5	±9	+9	+12	+15	+18	+20	+23	+29	+34	+39	+44	+40	
14	-193	-138	-77	-93	-50	-59	-75	-27	-34	-43	-14	-17	-5	-8	-11	-43	±4	±5.5	±9	+1	+1	+7	+7	+12	+18	+23	+28	+33	+56	+45
18	-160	-110	-65	-65	-40	-40	-40	-20	-20	-20	-7	-7	0	0	0	±4.5	±6.5	±10	+11	+15	+17	+21	+24	+28	+35	+41	+48	+54	+67	
24	-212	-162	-98	-117	-61	-73	-92	-33	-41	-53	-16	-20	-6	-9	-13	-33	±4.5	±6.5	±10	+2	+2	+8	+8	+15	+22	+28	+35	+41	+51	+54
30	-232	-182	-80	-80	-50	-50	-50	-25	-25	-25	-9	-9	0	0	0	±5.5	±8	±12	+13	+18	+20	+25	+28	+33	+42	+50	+59	+64	+76	
40	-180	-130	-119	-142	-75	-89	-112	-41	-50	-64	-20	-25	-7	-11	-16	-39	±6	±8	+2	+2	+9	+9	+17	+20	+26	+34	+43	+48	+60	
50	-264	-214	-100	-100	-60	-60	-60	-30	-30	-30	-10	-10	0	0	0	±6.5	±9.5	±15	+15	+21	+24	+30	+33	+39	+51	+62	+72	+85	+106	
65	-200	-150	-146	-174	-90	-106	-134	-49	-60	-76	-23	-29	-8	-13	-19	-46	±7	±10	+2	+2	+11	+11	+20	+23	+32	+43	+55	+66	+87	
80	-307	-257	-120	-120	-72	-72	-72	-36	-36	-36	-12	-12	0	0	0	±7.5	±11	±17	+18	+25	+28	+35	+38	+45	+59	+73	+83	+113	+146	
100	-240	-180	-174	-207	-107	-126	-159	-68	-71	-90	-27	-34	-10	-15	-22	-54	±8	±11	+3	+3	+13	+13	+23	+23	+37	+43	+65	+100	+166	
120	-327	-267	-120	-120	-72	-72	-72	-36	-36	-36	-12	-12	0	0	0	±8	±11	±17	+18	+25	+28	+35	+38	+45	+59	+73	+83	+113	+146	
140	-280	-200	-145	-145	-85	-85	-85	-43	-43	-43	-14	-14	0	0	0	±9	±12.5	±20	+21	+28	+33	+40	+40	+45	+59	+68	+90	+125	+159	
160	-380	-310	-208	-245	-125	-148	-185	-68	-83	-106	-32	-39	-12	-18	-25	-63	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
180	-310	-230	-170	-170	-100	-100	-100	-50	-50	-50	-15	-15	-22	-35	-54	-87	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
200	-410	-330	-230	-230	-140	-140	-140	-70	-70	-70	-23	-29	-8	-13	-19	-46	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
200	-340	-240	-170	-170	-100	-100	-100	-50	-50	-50	-15	-15	-22	-35	-54	-87	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
200	-455	-355	-240	-240	-140	-140	-140	-70	-70	-70	-23	-29	-8	-13	-19	-46	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
225	-380	-260	-170	-170	-100	-100	-100	-50	-50	-50	-15	-15	-22	-35	-54	-87	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
225	-495	-375	-242	-285	-146	-172	-215	-79	-96	-122	-35	-44	-14	-20	-29	-46	±10	±14.5	±23	+24	+33	+40	+40	+45	+59	+68	+90	+125	+159	
250	-420	-280	-190	-190	-110	-110	-110	-55	-56	-56	-17	-17	0	0	0	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140		
250	-535	-395	-240	-240	-140	-140	-140	-70	-70	-70	-23	-29	-8	-13	-19	-46	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140	
250	-480	-300	-190	-190	-110	-110	-110	-55	-56	-56	-17	-17	0	0	0	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140		
250	-610	-430	-190	-190	-110	-110	-110	-55	-56	-56	-17	-17	0	0	0	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140		
280	-540	-330	-271	-320	-162	-191	-240	-88	-108	-137	-40	-49	-16	-23	-32	-81	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140	
280	-670	-460	-271	-320	-162	-191	-240	-88	-108	-137	-40	-49	-16	-23	-32	-81	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140	
315	-600	-360	-271	-320	-162	-191	-240	-88	-108	-137	-40	-49	-16	-23	-32	-81	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140	
315	-740	-500	-271	-320	-162	-191	-240	-88	-108	-137	-40	-49	-16	-23	-32	-81	±11	±16	±26	+27	+36	+43	+52	+52	+66	+88	+94	+114	+140	
355	-680	-400	-289	-350	-182	-214	-265	-98	-119	-151	-43	-54	-18	-25	-36	-57	±12	±18	±28	+29	+40	+46	+57	+57	+73	+98	+108	+150		
355	-820	-540	-289	-350	-182	-214	-265	-98	-119	-151	-43	-54	-18	-25	-36	-57	±12	±18	±28	+29	+40	+46	+57	+57	+73	+98	+108	+150		
400	-760	-440	-230	-230	-135	-135	-135	-68	-68	-68	-20	-20	0	0	0	±13	±18	±31	+32	+45	+50	+63	+63	+80	+108	+126	+172			
400	-915	-595	-230	-230	-135	-135	-135	-68	-68	-68	-20	-20	0	0	0	±13	±18	±31	+32	+45	+50	+63	+63	+80	+108	+126	+172			
450	-840	-480	-327	-385	-198	-232	-290	-108	-131	-165	-47	-60	-20	-27	-40	-63	±13	±18	±31	+32	+45	+50	+63	+63	+80	+108	+126	+172		
450	-995	-635	-327	-385	-198	-232	-290	-108	-131	-165	-47	-60	-20	-27	-40	-63	±13	±18	±31	+32	+45	+50	+63	+63	+80	+108	+126	+172		

Note: In each column, the upper figure is the upper dimensional tolerance, and the lower figure is the lower dimensional tolerance. Note *: h4 and n5 are old JIS standards, however they are listed here because they apply to a large number of Misumi products.

1. General dimension tolerance for parts formed by press working from sheet metal JIS B 0408—1991—

Table 1. General dimension tolerances of punching Units: mm

Standard dimension	Grade		
	Grade A	Grade B	Grade C
No more than 6	±0.05	±0.1	±0.3
More than 6 No more than 30	±0.1	±0.2	±0.5
More than 30 No more than 120	±0.15	±0.3	±0.8
More than 120 No more than 400	±0.2	±0.5	±1.2
More than 400 No more than 1000	±0.3	±0.8	±2
More than 1000 No more than 2000	±0.5	±1.2	±3

Note Grade A, B, and C are equivalent to tolerance grades f, m, and c in JIS B 0405.

Table 2. General dimensional tolerances of bending and drawing Units: mm

Standard dimension	Grade		
	Grade A	Grade B	Grade C
No more than 6	±0.1	±0.3	±0.5
More than 6 No more than 30	±0.2	±0.5	±1
More than 30 No more than 120	±0.3	±0.8	±1.5
More than 120 No more than 400	±0.5	±1.2	±2.5
More than 400 No more than 1000	±0.8	±2	±4
More than 1000 No more than 2000	±1.2	±3	±6

Note Grade A, B, and C are equivalent to tolerance grades f, m, and c in JIS B 0405.

2. General tolerances for parts formed by shear from metal plates JIS B 0410—1991—

Table 1. General dimensional tolerances of cut widths

Units: mm

Standard dimension	Material thickness (t) class							
	$t \leq 1.6$		$1.6 < t \leq 3$		$3 < t \leq 6$		$6 < t \leq 12$	
	Grade							
	Grade A	Grade B	Grade A	Grade B	Grade A	Grade B	Grade A	Grade B
No more than 30	±0.1	±0.3	—	—	—	—	—	—
More than 30 No more than 120	±0.2	±0.5	±0.3	±0.5	±0.8	±1.2	—	±1.5
More than 120 No more than 400	±0.3	±0.8	±0.4	±0.8	±1	±1.5	—	±2
More than 400 No more than 1000	±0.5	±1	±0.5	±1.2	±1.5	±2	—	±2.5
More than 1000 No more than 2000	±0.8	±1.5	±0.8	±2	±2	±3	—	±3
More than 2000 No more than 4000	±1.2	±2	±1.2	±2.5	±3	±4	—	±4

Table 2. General tolerances of straightness

Units: mm

Nominal dimension of cut length	Material thickness (t) class							
	$t \leq 1.6$		$1.6 < t \leq 3$		$3 < t \leq 6$		$6 < t \leq 12$	
	Grade							
	Grade A	Grade B	Grade A	Grade B	Grade A	Grade B	Grade A	Grade B
No more than 30	0.1	0.2	—	—	—	—	—	—
More than 30 No more than 120	0.2	0.3	0.2	0.3	0.5	0.8	—	1.5
More than 120 No more than 400	0.3	0.5	0.3	0.5	0.8	1.5	—	2
More than 400 No more than 1000	0.5	0.8	0.5	1	1.5	2	—	3
More than 1000 No more than 2000	0.8	1.2	0.8	1.5	2	3	—	4
More than 2000 No more than 4000	1.2	2	1.2	2.5	3	5	—	6

Table 3. General tolerances for perpendicularity

Units: mm

Nominal length of short side	Material thickness (t) class					
	$t \leq 3$		$3 < t \leq 6$		$6 < t \leq 12$	
	Grade					
	Grade A	Grade B	Grade A	Grade B	Grade A	Grade B
No more than 30	—	—	—	—	—	—
More than 30 No more than 120	0.3	0.5	0.5	0.8	—	1.5
More than 120 No more than 400	0.8	1.2	1	1.5	—	2
More than 400 No more than 1000	1.5	3	2	3	—	3
More than 1000 No more than 2000	3	6	4	6	—	6
More than 2000 No more than 4000	6	10	6	10	—	10

1. Regular cut dimension tolerance JIS B 0405 —1991—

Tolerances for length excluding chamfered portion

Units: mm

Tolerance class		Standard dimension range							
Symbol	Description	Over 0.5 ⁽¹⁾ to 3 incl.	Over 3 to 6 incl.	Over 6 to 30 incl.	Over 30 to 120 incl.	Over 120 to 400 incl.	Over 400 to 1000 incl.	Over 1000 to 2000 incl.	Over 2000 to 4000 incl.
		Tolerance							
f	Precision grade	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	—
m	Medium class	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
c	Coarse class	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4
v	Very coarse class	—	±0.5	±1	±1.5	±2.5	±4	±6	±8

Note ⁽¹⁾: Tolerances for standard dimensions of less than 0.5 mm shall be specified individually.

2. Tolerance for length of chamfered portion (radius of rounding for edges and edge chamfering dimension)

Units: mm

Tolerance class		Standard dimension range		
Symbol	Description	Over 0.5 ⁽²⁾ to 3 incl.	Over 3 to 6 incl.	Over 6
		Tolerance		
f	Precision grade	±0.2	±0.5	±1
m	Medium class	±0.2	±0.5	±1
c	Coarse class	±0.4	±1	±2
v	Very coarse class	±0.4	±1	±2

Note ⁽²⁾: Tolerances for standard dimensions of less than 0.5 mm shall be specified individually.

3. Angle tolerance

Tolerance class		Length of shorter side of angle (Units: mm)				
Symbol	Description	10 or less	Over 10 to 50 incl.	Over 50 to 120 incl.	Over 120 to 400 incl.	Over 400
		Tolerance				
f	Precision grade	±1°	±30′	±20′	±10′	±5′
m	Medium class	±1°	±30′	±20′	±10′	±5′
c	Coarse class	±1°30′	±1°	±30′	±15′	±10′
v	Very coarse class	±3°	±2°	±1°	±30′	±20′

4. Regular perpendicularity tolerance JIS B 0419 —1991—

Units: mm

Tolerance class	Nominal length on shorter side			
	100 or less	Over 100 to 300 incl.	Over 300 to 1000 incl.	Over 1000 to 3000 incl.
Perpendicularity tolerance				
H	0.2	0.3	0.4	0.5
K	0.4	0.6	0.8	1
L	0.6	1	1.5	2

5. Regular straightness and flatness tolerance JIS B 0419 —1991—

Units: mm


Tolerance class	Nominal length					
	10 or less	Over 10 to 30 incl.	Over 30 to 100 incl.	Over 100 to 300 incl.	Over 300 to 1000 incl.	Over 1000 to 3000 incl.
Straightness and flatness tolerance						
H	0.02	0.05	0.1	0.2	0.3	0.4
K	0.05	0.1	0.2	0.4	0.6	0.8
L	0.1	0.2	0.4	0.8	1.2	1.6

6. Regular symmetry tolerance

Units: mm

Tolerance class	Nominal length			
	100 or less	Over 100 to 300 incl.	Over 300 to 1000 incl.	Over 1000 to 3000 incl.
Symmetry tolerance				
H	0.5			
K	0.5			
L	0.6	1	1.5	2

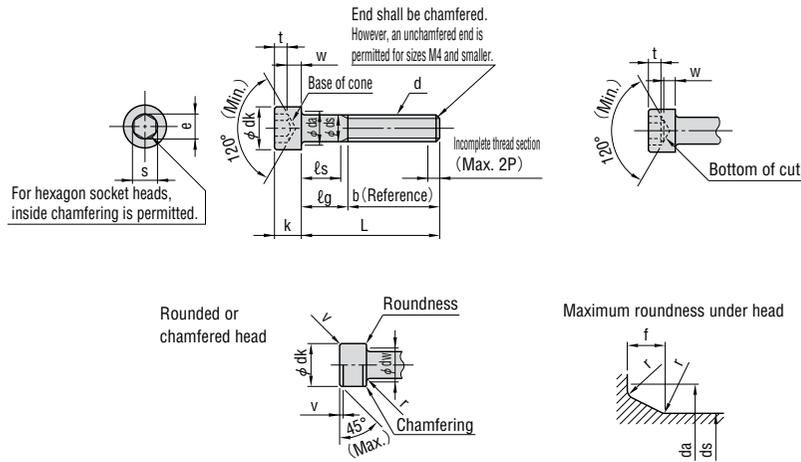1. Names of parts



$$f \text{ (Max.)} = 1.7r \text{ (Max.)}$$

$$r \text{ (Max.)} = \frac{da \text{ (Max.)} - ds \text{ (Max.)}}{2}$$

$$r \text{ (Min.)} = \text{As shown in provided table}$$

Units: mm

Thread nominal (d) (°)	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24	(M27)	M30		
Thread pitch (P)	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5		
b	18	20	22	24	28	32	36	40	44	48	52	56	60	66	72		
dk	Max. (standard dimension) *	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36	40	45	
	Max. **	5.68	7.22	8.72	10.22	13.27	16.27	18.27	21.33	24.33	27.33	30.33	33.39	36.39	40.39	45.39	
	Min.	5.32	6.78	8.28	9.78	12.73	15.73	17.73	20.67	23.67	26.67	29.67	32.61	35.61	39.61	44.61	
da	Max.	3.6	4.7	5.7	6.8	9.2	11.2	13.7	15.7	17.7	20.2	22.4	26.4	30.4	33.4		
ds	Max. (standard dimension)	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30	
	Min.	2.86	3.82	4.82	5.82	7.78	9.78	11.73	13.73	15.73	17.73	19.67	21.67	23.67	26.67	29.67	
e	Min.	2.87	3.44	4.58	5.72	6.86	9.15	11.43	13.72	16.00	16.00	19.44	19.44	21.73	21.73	25.15	
f	Max.	0.51	0.60	0.60	0.68	1.02	1.02	1.45	1.45	1.45	1.87	2.04	2.04	2.04	2.89	2.89	
k	Max. (standard dimension)	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30	
	Min.	2.86	3.82	4.82	5.70	7.64	9.64	11.57	13.57	15.57	17.57	19.48	21.48	23.48	26.48	29.48	
r	Min.	0.1	0.2	0.2	0.25	0.4	0.4	0.6	0.6	0.6	0.8	0.8	0.8	1	1		
s	Nominal (standard dimension)	2.5	3	4	5	6	8	10	12	14	14	17	17	19	19	22	
	Min.	2.52	3.02	4.02	5.02	6.02	8.025	10.025	12.032	14.032	14.032	17.050	17.050	19.065	19.065	22.065	
	Max. (1)	Section 1	2.580	3.080	4.095	5.140	6.140	8.175	10.175	12.212	14.212	14.212	17.230	17.230	19.275	19.275	22.275
		Section 2	2.560	3.080	4.095	5.095	6.095	8.115	10.115	12.142	14.142	14.142					
t	Min.	1.3	2	2.5	3	4	5	6	7	8	9	10	11	12	13.5	15.5	
v	Max.	0.3	0.4	0.5	0.6	0.8	1	1.2	1.4	1.6	1.8	2	2.2	2.4	2.7	3	
d_w	Min.	5.07	6.53	8.03	9.38	12.33	15.33	17.23	20.17	23.17	25.87	28.87	31.81	34.81	38.61	43.61	
w	Min.	1.15	1.4	1.9	2.3	3.3	4	4.8	5.8	6.8	7.7	8.6	9.5	10.4	12.1	13.1	

Note (1): Section 1 for "s (Max.)" applies to bolts with strength class 8.8 and 10.9 and property class A2—50 and A2—70. Section 2 applies to bolts with strength class 12.9. However, based on agreement between the parties involved in the delivery, Section 1 may be applied to bolts with strength class 12.9.

s (Max.) for bolts of nominal size M20 or larger applies to bolts of all strength classes and property classes.

Note (2): Nominal sizes shown in () should not be used whenever possible.

- Remarks
- Add a straight knurl or diamond knurl (refer to JIS B 0951 (KNURLING)) to the sides of the head. In this case, dk (Max.) is the value marked by ** in this table.
If a bolt without knurling is required, it shall be specified by the ordering party. However the dk (Max.) is the value marked by * in this table.
 - The recommended length (ℓ) for the nominal thread size shall be enclosed in a bold line.
For cases in which L is shorter than the position of the dotted line, full thread shall be used and the length of the incomplete thread part under the head shall be approximately 3P.
 - ℓg (Max.) and ℓs (Min.) for cases of a nominal length (ℓ) longer than the position of the dotted line shall be determined by the following formula.

$$\ell g \text{ (Max.)} = \text{Nominal length } (\ell) - b$$

$$\ell s \text{ (Min.)} = \ell g \text{ (Max.)} - 5P$$

[TECHNICAL DATA] TABLE OF HOLE SIZES BEFORE THREADING

1. Metric coarse thread

Nominal thread size	Minimum dimension Grade 2 / Grade 3	Maximum dimension	
		Grade 2	Grade 3
M 1 × 0.25	0.73	0.78	—
M 1.1 × 0.25	0.83	0.89	—
M 1.2 × 0.25	0.93	0.98	—
M 1.4 × 0.3	1.08	1.14	—
M 1.6 × 0.35	1.22	1.32	—
M 1.7 × 0.35	1.33	1.42	—
M 1.8 × 0.35	1.42	1.52	—
M 2 × 0.4	1.57	1.67	—
M 2.2 × 0.45	1.71	1.84	—
M 2.3 × 0.4	1.87	1.97	—
M 2.5 × 0.45	2.01	2.14	—
M 2.6 × 0.45	2.12	2.23	—
M 3 × 0.5	2.46	2.60	2.64
M 3.5 × 0.6	2.85	3.01	3.05
M 4 × 0.7	3.24	3.42	3.47
M 4.5 × 0.75	3.69	3.88	3.92
M 5 × 0.8	4.13	4.33	4.38
M 6 × 1	4.92	5.15	5.22
M 7 × 1	5.92	6.15	6.22
M 8 × 1.25	6.65	6.91	6.98
M 9 × 1.25	7.65	7.91	7.98
M 10 × 1.5	8.38	8.68	8.75
M 11 × 1.5	9.38	9.68	9.75
M 12 × 1.75	10.11	10.44	10.53
M 14 × 2	11.84	12.21	12.31
M 16 × 2	13.84	14.21	14.31
M 18 × 2.5	15.29	15.74	15.85
M 20 × 2.5	17.29	17.74	17.85
M 22 × 2.5	19.29	19.74	19.85
M 24 × 3	20.75	21.25	21.38
M 27 × 3	23.75	24.25	24.38
M 30 × 3.5	26.21	26.77	26.92
M 33 × 3.5	29.21	29.77	29.92
M 36 × 4	31.67	32.27	32.42
M 39 × 4	34.67	35.27	35.42
M 42 × 4.5	37.13	37.80	37.98
M 45 × 4.5	40.13	40.80	40.98
M 48 × 5	42.59	43.30	43.49

Nominal thread size	Minimum dimension Grade 2 / Grade 3	Maximum dimension	
		Grade 2	Grade 3
M 16 × 1.5	14.38	14.68	14.75
M 16 × 1	14.92	15.15	15.22
M 17 × 1.5	15.38	15.68	15.75
M 17 × 1	15.92	16.15	16.22
M 18 × 2	15.84	16.21	16.31
M 18 × 1.5	16.38	16.68	16.75
M 18 × 1	16.92	17.15	17.22
M 20 × 2	17.84	18.21	18.31
M 20 × 1.5	18.38	18.68	18.75
M 20 × 1	18.92	19.15	19.22
M 22 × 2	19.84	20.21	20.31
M 22 × 1.5	20.38	20.68	20.75
M 22 × 1	20.92	21.15	21.22
M 24 × 2	21.84	22.21	22.31
M 24 × 1.5	22.38	22.68	22.75
M 24 × 1	22.92	23.15	23.22
M 25 × 2	22.84	23.21	23.31
M 25 × 1.5	23.38	23.68	23.75
M 25 × 1	23.92	24.15	24.22
M 26 × 1.5	24.38	24.68	24.75
M 27 × 2	24.84	25.21	25.31
M 27 × 1.5	25.38	25.68	25.75
M 27 × 1	25.92	26.15	26.22
M 28 × 2	25.84	26.21	26.31
M 28 × 1.5	26.38	26.68	26.75
M 28 × 1	26.92	27.15	27.22
M 30 × 3	26.75	27.25	27.38
M 30 × 2	27.84	28.21	28.31
M 30 × 1.5	28.38	28.68	28.75
M 30 × 1	28.92	29.15	29.22
M 32 × 2	29.84	30.21	30.31
M 32 × 1.5	30.38	30.68	30.75
M 33 × 3	29.75	30.25	30.38
M 33 × 2	30.84	31.21	31.31
M 33 × 1.5	31.38	31.68	31.75
M 35 × 1.5	33.38	33.68	33.75
M 36 × 3	32.75	33.25	33.38
M 36 × 2	33.84	34.21	34.31
M 36 × 1.5	34.38	34.68	34.75
M 38 × 1.5	36.38	36.68	36.75
M 39 × 3	35.75	36.25	36.38
M 39 × 2	36.84	37.21	37.31
M 39 × 1.5	37.38	37.68	37.75
M 40 × 3	36.75	37.25	37.38
M 40 × 2	37.84	38.21	38.31
M 40 × 1.5	38.38	38.68	38.75
M 42 × 4	37.67	38.27	38.42
M 42 × 3	38.75	39.25	39.38
M 42 × 2	39.84	40.21	40.31
M 42 × 1.5	40.38	40.68	40.75
M 45 × 4	40.67	41.27	41.42
M 45 × 3	41.75	42.25	42.38
M 45 × 2	42.84	43.21	43.31
M 45 × 1.5	43.38	43.68	43.75
M 48 × 4	43.67	44.27	44.42
M 48 × 3	44.75	45.25	45.38
M 48 × 2	45.84	46.21	46.31
M 48 × 1.5	46.38	46.68	46.75
M 50 × 3	46.75	47.25	47.38
M 50 × 2	47.84	48.21	48.31
M 50 × 1.5	48.38	48.68	48.75

2. Metric fine thread

Nominal thread size	Minimum dimension Grade 2 / Grade 3	Maximum dimension	
		Grade 2	Grade 3
M 2.5 × 0.35	2.12	2.22	—
M 3 × 0.35	2.62	2.72	—
M 3.5 × 0.35	3.12	3.22	—
M 4 × 0.5	3.46	3.60	3.64
M 4.5 × 0.5	3.96	4.10	4.14
M 5 × 0.5	4.46	4.60	4.64
M 5.5 × 0.5	4.96	5.10	5.14
M 6 × 0.75	5.19	5.38	5.42
M 7 × 0.75	6.19	6.38	6.42
M 8 × 1	6.92	7.15	7.22
M 8 × 0.75	7.19	7.38	7.42
M 9 × 1	7.92	8.15	8.22
M 9 × 0.75	8.19	8.38	8.42
M 10 × 1.25	8.65	8.91	8.98
M 10 × 1	8.92	9.15	9.22
M 10 × 0.75	9.19	9.38	—
M 11 × 1	9.92	10.15	10.22
M 11 × 0.75	10.19	10.38	10.42
M 12 × 1.5	10.38	10.68	10.75
M 12 × 1.25	10.65	10.91	10.98
M 12 × 1	10.92	11.15	11.22
M 14 × 1.5	12.38	12.68	12.75
M 14 × 1	12.92	13.15	13.22
M 15 × 1.5	13.38	13.68	13.75
M 15 × 1	13.92	14.15	14.22

[TECHNICAL DATA] PROPER BOLT AXIAL TIGHTENING FORCE / TORQUE

■ Axial tightening force and fatigue limit when fastening with bolts

- When calculating the suitable axial tightening force for bolt tightening, the maximum force shall be 70% of the standard proof strength using the torque control method, and the force shall be within the elastic range.
- Bolt fatigue strength under repeated load must not exceed the maximum allowable value.
- The bolt and nut seat must not cause any depression in the fastened part.
- Tightening must not cause any damage to the fastened part.

Methods of bolt tightening include the torque control method, torque gradient control method, rotation angle control method, and extension measurement method. The torque control method is most commonly used, due to its simplicity.

■ Calculation of axial tightening force and tightening torque

The relationship of axial tightening force F_f is shown by Formula (1). k : Torque coefficient

$$F_f = 0.7 \times \sigma_y \times A_s \dots \dots (1)$$

Tightening torque T_{fA} is found from Formula (2).

$$T_{fA} = 0.35k(1 + 1/Q) \sigma_y \cdot A_s \cdot d \dots \dots (2)$$

d : Bolt nominal diameter [cm]

Q : Tightening coefficient

σ_y : Proof strength (112 kgf/mm² for strength class 12.9)

A_s : Bolt effective cross-section area [mm²]

■ Sample calculation

Find the suitable torque and axial force when using an M6 hexagon socket head cap screw (strength class 12.9) to fasten soft steel to soft steel, and tightening with oil lubrication.

• The suitable torque is found by Formula (2), as shown below.

$$\begin{aligned} T_{fA} &= 0.35k(1 + 1/Q) \sigma_y \cdot A_s \cdot d \\ &= 0.35 \cdot 0.17(1 + 1/1.4) 112 \cdot 20.1 \cdot 0.6 \\ &= 138 [\text{kgf} \cdot \text{cm}] \end{aligned}$$

• Axial force F_f is found from Formula (1), as shown below.

$$\begin{aligned} F_f &= 0.7 \times \sigma_y \times A_s \\ &= 0.7 \times 112 \times 20.1 \\ &= 1576 [\text{kgf}] \end{aligned}$$

■ Torque coefficient based on the combination of bolt surface treatment, tightened parts, and internal thread material

Bolt Surface treatment Lubrication	Torque coefficient k	Combination Tightened part material—Female screw material	
		(a)	(b)
Steel bolt Black oxide coating Not lubricated	0.145	SCM—FC	FC—FC SUS—FC
	0.155	S10C—FC SCM—S10C SCM—SCM FC—S10C FC—SCM	
	0.165	SCM—SUS FC—SUS AL—FC SUS—S10C SUS—SCM SUS—SUS	
	0.175	S10C—S10C S10C—SCM S10C—SUS AL—S10C AL—SCM	
	0.185	SCM—AL FC—AL AL—SUS	
	0.195	S10C—AL SUS—AL	
Steel bolt Black oxide coating Not lubricated	0.215	AL—AL	
	0.25	S10C—FC SCM—FC FC—FC	
	0.35	S10C—FC SCM—S10C SCM—SCM FC—S10C FC—SCM	
	0.45	S10C—S10C SCM—S10C AL—S10C AL—SCM	
	0.55	SCM—AL FC—AL AL—AL	

S10C: Non-heat-treated soft steel SCM: Heat treated steel (35HRC) FC: Cast iron (FC200) AL: Aluminum SUS: Stainless steel (sus304)

■ Standard value for tightening coefficient Q

Tightening coefficient Q	Tightening method	Surface condition		Lubrication
		Bolt	Nut	
1.25	Torque wrench	Manganese phosphate		
1.4	Torque wrench	Untreated or phosphate	Untreated or phosphate	Not lubricated or MoS ₂ paste
	Torque wrench with torque limiter			
1.6	Impact wrench			
1.8	Torque wrench	Untreated or phosphate	Untreated	Not lubricated
	Torque wrench with torque limiter			

Indicating the strength class

Example: 12.9

— Proof strength (yield stress): 90% of minimum tensile strength
 — Minimum tensile strength is 1220 N/mm² [124kgf/mm²]

10.9

— Proof strength (yield stress): 90% of minimum tensile strength
 — Minimum tensile strength is 1040 N/mm² [106kgf/mm²]

■ Initial tightening force and tightening torque

Nominal thread size	Effective cross-section area As mm ²	Strength class											
		12.9			10.9			8.8			4.8		
		Yield load	Initial tightening force	Tightening torque	Yield load	Initial tightening force	Tightening torque	Yield load	Initial tightening force	Tightening torque	Yield load	Initial tightening force	Tightening torque
		kgf	kgf	kgf · cm	kgf	kgf	kgf · cm	kgf	kgf	kgf · cm	kgf	kgf	kgf · cm
M 3×0.5	5.03	563	394	17	482	338	15	328	230	10	175	122	5
M 4×0.7	8.78	983	688	40	842	589	34	573	401	23	305	213	12
M 5×0.8	14.2	1590	1113	81	1362	953	69	927	649	47	493	345	25
M 6×1	20.1	2251	1576	138	1928	1349	118	1313	919	80	697	488	43
M 8×1.25	36.6	4099	2869	334	3510	2457	286	2390	1673	195	1270	889	104
M10×1.5	58	6496	4547	663	5562	3894	567	3787	2651	386	2013	1409	205
M12×1.75	84.3	9442	6609	1160	8084	5659	990	5505	3853	674	2925	2048	358
M14×2	115	12880	9016	1840	11029	7720	1580	7510	5257	1070	3991	2793	570
M16×2	157	17584	12039	2870	15056	10539	2460	10252	7176	1670	5448	3814	889
M18×2.5	192	21504	15053	3950	18413	12889	3380	12922	9045	2370	6662	4664	1220
M20×2.5	245	27440	19208	5600	23496	16447	4790	16489	11542	3360	8502	5951	1730
M22×2.5	303	33936	23755	7620	29058	20340	6520	20392	14274	4580	10514	7360	2360
M24×3	353	39536	27675	9680	33853	23697	8290	23757	16630	5820	12249	8574	3000

Note: • Tightening condition: Tightened by torque wrench. (Surface oil lubrication Torque coefficient $k=0.17$ Tightening coefficient $Q=1.4$)

• Because the torque coefficient varies depending on the conditions of use, use this table only as an approximate guide.

• This table consists of edited excerpts from the Catalog of Kyokuto MFG Co Ltd.

[TECHNICAL DATA] STRENGTH OF BOLTS, SCREW PLUGS, AND DOWEL PINS

■ Bolt strength

1) When bolt is subjected to tensile load

$$P_t = \sigma_t \times A_s \dots (1)$$

$$= \pi d^2 \sigma_t / 4 \dots (2)$$

P_t : Tensile load in axial direction [kgf]
 σ_b : Bolt yield stress [kgf/mm²]
 σ_t : Bolt maximum allowable stress [kgf/mm²]
 ($\sigma_t = \sigma_b / (\text{safety factor } \alpha)$)
 A_s : Bolt effective cross-section area [mm²]
 $A_s = \pi d^2 / 4$
 d : Bolt effective diameter (root diameter) [mm]

Example: Find a suitable size for a single hexagon socket head cap screw that will be subjected to repeated (pulsating) tensile loads of $P=200$ kgf. (Hexagon socket head cap screw material: SCM435, 38~43 HRC, strength class 12.9)

From formula (1):


$$A_s = P_t / \sigma_t$$

$$= 200 / 22.4$$

$$= 8.9 [\text{mm}^2]$$

∴ Finding the effective cross-section area larger than this value from the table at right shows that a 14.2 [mm²] M5 cap screw should be selected.

With additional consideration for the fatigue strength, and based on the strength class of 12.9 in the table, we select an M6 screw with maximum allowable load of 213 kgf.



2) For stripper bolts and others which are subjected to tensile impact loads, the selection is made based on the fatigue strength. (The bolt is subjected to 200 kgf loads in the same way. Stripper bolt material: SCM 435 33~38 HRC, strength class 10.9.)

From the table at right, for a strength class of 10.9 and a maximum allowable load of 200 kgf, the suitable bolt is a 318 [kgf] M8. Therefore we select a 10 mm MSB10 with a M8 thread section. When the bolt is subjected to shear load, also use a dowel pin.

■ Unwin safety factor α based on tensile strength

M	Static load	Repeated load		Impact load
		Pulsating	Alternating	
Steel	3	5	8	12
Cast iron	4	6	10	15
Copper, soft metals	5	5	9	15

Shear stress = $\frac{\text{Standard strength}}{\text{Safety factor } \alpha}$ Standard strength: For ductile materials=Yield stress
For brittle materials=Fracture stress

Yield stress for strength class 12.9 $\sigma_b = 112$ [kgf/mm²]
 Maximum allowable stress $\sigma_t = \sigma_b / (\text{safety factor})$
 (From table above, safety factor=5)
 $= 112/5$
 $= 22.4$ [kgf/mm²]

■ Bolt fatigue strength (For threads: fatigue strength = count of 2 million)

Nominal thread size	Effective cross-section area A_s mm ²	Strength class			
		12.9		10.9	
		Fatigue strength* kgf/mm ²	Maximum allowable load kgf	Fatigue strength* kgf/mm ²	Maximum allowable load kgf
M 4	8.78	13.1	114	9.1	79
M 5	14.2	11.3	160	7.8	111
M 6	20.1	10.6	213	7.4	149
M 8	36.6	8.9	326	8.7	318
M10	58	7.4	429	7.3	423
M12	84.3	6.7	565	6.5	548
M14	115	6.1	702	6	690
M16	157	5.8	911	5.7	895
M20	245	5.2	1274	5.1	1250
M24	353	4.7	1659	4.7	1659

Fatigue strengths* have been excerpted from "Estimated values of fatigue limits for metal threads of small screws, bolts, and nuts" (Yamamoto) and modified.

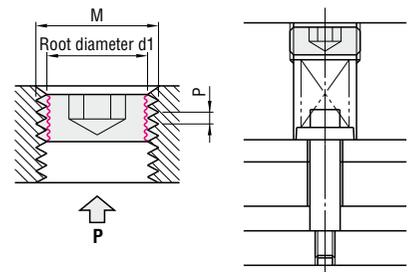
■ Screw plug strength

Find the maximum allowable load P when a MSW30 screw plug is subjected to impact load. (MSW30 material: S45C, tensile strength σ_b at 34~43 HRC 65 kgf/mm²)

Assuming fracture due to shear occurs at the MSW root diameter location, the maximum allowable load $P = \tau \times A$.
 $= 3.9 \times 107.4$
 $= 4190$ [kgf]

Shear cross-section area $A = \text{Root diameter } d_1 \times \pi \times L$
 (Root diameter $d_1 = M - P$)
 $A = (M - P) \pi L = (30 - 1.5) \pi \times 12$
 $= 1074$ [mm²]
 Yield stress $\approx 0.9 \times \text{Tensile strength } \sigma_b = 0.9 \times 65 = 58.2$
 Shear stress $\approx 0.8 \times \text{Yield stress}$
 $= 46.6$
 Maximum allowable shear stress $\tau_t = \text{Shear stress} / (\text{Safety factor } 12)$
 $= 46.6 / 12 = 3.9$ [kgf/mm²]

When the tap is a soft materials, find the maximum allowable shear from the inside thread root diameter.



■ Dowel pin strength

Find a suitable size for a single dowel pin which is subjected to repeated (pulsating) shear loads of 800 kgf. (Dowel pin material: SUJ2 hardness 58 HRC or higher)

$$P = A \times \tau$$

$$= \pi D^2 \tau / 4$$

$$D = \sqrt{(4P) / (\pi \tau)}$$

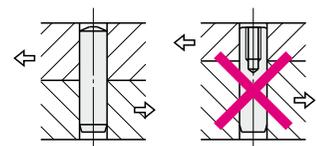
$$= \sqrt{(4 \times 800) / (3.14 \times 19.2)}$$

$$\approx 7.3$$

SUJ2 yield stress capability $\sigma_b = 120$ [kgf/mm²]
 Maximum allowable shear strength $\tau = \sigma_b \times 0.8 / (\text{Safety factor } \alpha)$
 $= 120 \times 0.8 / 5$
 $= 19.2$ [kgf/mm²]

∴ For an MS dowel pin, select a size of D8 or larger.













In addition, selecting a single size for all dowel pins makes it possible to reduce items such as tools and inventory.





Do not use in such a way that load is applied to the threads.

The information provided here is only an example of calculating the strength. For actual selections, it is necessary to consider the hole pitch accuracy, hole perpendicularity, surface roughness, true roundness, plate material, parallelism, use of hardening, accuracy of the press machine, product production volume, tool wear, and various other conditions. Therefore the strength calculation value should be used only as a guide. (It is not a guaranteed value.)

[TECHNICAL DATA] CALCULATION OF CUBIC VOLUME AND MATERIAL PHYSICAL PROPERTIES

3D shape	Volume V	3D shape	Volume V	3D shape	Volume V
	$V = \frac{\pi}{4} d^2 h$ $= \frac{\pi}{4} d^2 \left(\frac{h_1 + h_2}{2} \right)$		$V = \frac{\pi^2}{4} d^2 \frac{\sqrt{a^2 + b^2}}{2}$		$V = \frac{2}{3} \pi r^2 h$ $= 2.0944r^2 h$
	$V = \frac{h}{3} A = \frac{h}{6} \pi r^2 n$ <p>A=Bottom surface area r=Radius of inscribed circle a=Length of 1 side of regular polygon n=Number of regular polygon sides</p>		$V = \frac{\pi}{4} d^2 \left(\ell + \ell' \frac{d}{3} \right)$		$V = 2 \pi^2 R r^2$ $= 19.739 R r^2$ $= \frac{\pi^2}{4} D d^2$ $= 2.4674 D d^2$
	$V = \frac{\pi h^2}{3} (3r - h)$ $= \frac{\pi h}{6} (3a^2 + h^2)$ <p>a is the radius.</p>		$V = \frac{\pi}{4} h (D^2 - d^2)$ $= \pi t h (D - t)$ $= \pi t h (d + t)$		$V = \frac{\pi}{3} r^2 h$ $= 1.0472 r^2 h$
	$V = \frac{4}{3} \pi a b c$ <p>In the case of a rotating ellipsoidal body (b=c):</p> $V = \frac{4}{3} \pi a b^2$		$V = \frac{h}{3} (A + a + \sqrt{Aa})$ <p>A, a=Surface area of each end</p>		$V = \frac{4}{3} \pi r^3 = 4.1888 r^3$ $= \frac{\pi}{6} d^3 = 0.5236 d^3$

3D shape	Volume V
	$V = \frac{\pi h}{6} (3a^2 + 3b^2 + h^2)$
	<p>When curve has circumference that is an arc: $V = \frac{\pi \ell}{12} (2D^2 + d^2)$ </p> <p>When curve has circumference that is a parabola: $V = 0.209 \ell (2D^2 D d + 1/4 d^3)$ </p>

Physical properties of metal materials

Material	Density [g/cm ³]	Young's modulus E [kgf/mm ²]	Coefficient of thermal expansion [M10 ⁻⁶ /°C]
Soft steel	7.85	21000	11.7
SKD11	7.85	21000	11.7
Powdered high-speed steel (HAP40)	8.07	23300	10.1
Carbide V30	14.1	56000	6.0
Cast iron	7.3	7500 ~ 10500	9.2 ~ 11.8
SUS304	8.0	19700	17.3
Oxygen-free copper C1020	8.9	11700	17.6
6/4 brass C2801	8.4	10300	20.8
Aluminum A1100	2.7	6900	23.6
Duralumin A7075	2.8	7200	23.6
Titanium	4.5	10600	8.4

1kgf/mm² = 9.80665 × 10⁶ Pa

Finding the weight


Weight W [g] = Volume [cm³] × Density

[Example] Material: Soft steel

Weight when $\phi = 16$ and $L = 50$ mm is found as follows.

$$W = \frac{\pi}{4} D^2 \times L \times \text{Density}$$

$$= \frac{\pi}{4} \times 16^2 \times 50 \times 7.85$$

$$\approx 79 \text{ [g]}$$



Finding dimensional changes resulting from thermal expansion

Example: Material: SKD11

Example: The amount of dimensional change δ which occurs when a pin of $D = \phi 2$, $L = 100$ mm is heated to 100°C is the following.

δ = Coefficient of thermal expansion × Total length × Temperature change

$$= 11.7 \times 10^{-6} \times 100 \text{ mm} \times 100^\circ\text{C}$$

$$= 0.117 \text{ [mm]}$$


Finding dimensional changes resulting from Young's modulus E


Example: Find strain λ when load $P = 1000$ kgf is applied to a $\phi 10 \times L60$ pin. (Material: SKD11)

$$E = \frac{PL}{A\lambda}$$












$$\lambda = \frac{PL}{AE} = \frac{1000 \times 60}{78.5 \times 21000}$$











$$\approx 0.036 \text{ mm}$$

Cross-section area $A = \frac{\pi}{4} D^2 = 78.5$




[TECHNICAL DATA] CALCULATION OF AREA, CENTER OF GRAVITY, AND GEOMETRICAL MOMENT OF INERTIA

Cross section	Cross section area A	Distance of center of gravity e	Geometrical moment of inertia I	Cross section modulus Z=I/e
	bh	$\frac{h}{2}$	$\frac{bh^3}{12}$	$\frac{bh^2}{6}$
	h^2	$\frac{h}{2}$	$\frac{h^4}{12}$	$\frac{h^3}{6}$
	h^2	$\frac{h}{2}\sqrt{2}$	$\frac{h^4}{12}$	$0.1179 h^3 = \frac{\sqrt{2}}{12} h^3$
	$\frac{bh}{2}$	$\frac{2}{3}h$	$\frac{bh^3}{36}$	$\frac{bh^2}{24}$
	$(2b+b_1) \frac{h}{2}$	$\frac{1}{3} \times \frac{3b+2b_1}{2b+b_1} h$	$\frac{6b^2+6bb_1+b_1^2}{36(2b+b_1)} h^3$	$\frac{6b^2+6bb_1+b_1^2}{12(3b+2b_1)} h^2$
	$\frac{3\sqrt{3}}{2} r^2$ $= 2.598 r^2$	$\sqrt{\frac{3}{4}} r = 0.866 r$	$\frac{5\sqrt{3}}{16} r^4 = 0.5413 r^4$	$\frac{5}{8} r^3$
		r		$\frac{5\sqrt{3}}{16} r^3 = 0.5413 r^3$
	$2.828 r^2$	$0.924 r^2$	$\frac{1+2\sqrt{2}}{6} r^4$ $= 0.6381 r^4$	$0.6906 r^3$
	$0.8284 a^2$	$b = \frac{a}{1+\sqrt{2}}$ $= 0.4142 a$	$0.0547 a^4$	$0.1095 a^3$
	$\pi r^2 = \frac{\pi d^2}{4}$	$\frac{d}{2}$	$\frac{\pi d^4}{64} = \frac{\pi r^4}{4}$ $= 0.0491 d^4$ $\approx 0.05 d^4$ $= 0.7854 r^4$	$\frac{\pi d^3}{32} = \frac{\pi r^3}{4}$ $= 0.0982 d^3$ $\approx 0.1 d^3$ $= 0.7854 r^3$
	$r^2 \left(1 - \frac{\pi}{4}\right)$ $= 0.2146 r^2$	$e_1 = 0.2234 r$ $e_2 = 0.7766 r$	$0.0075 r^4$	$\frac{0.0075 r^4}{e_2}$ $= 0.00966 r^3$ $\approx 0.01 r^3$

Cross section	Cross section area A	Distance of center of gravity e	Geometrical moment of inertia I	Cross section modulus Z = I/e
	πab	a	$\frac{\pi}{4} ba^3 = 0.7854 ba^3$	$\frac{4}{\pi} ba^2 = 0.7854 ba^2$
	$\frac{\pi}{2} r^2$	$e_1 = 0.4244 r$ $e_2 = 0.5756 r$	$\left(\frac{\pi}{8} - \frac{8}{9\pi}\right) r^4$ $= 0.1098 r^4$	$Z_1 = 0.2587 r^3$ $Z_2 = 0.1908 r^3$
	$\frac{\pi}{4} r^2$	$e_1 = 0.4244 r$ $e_2 = 0.5756 r$	$0.055 r^4$	$Z_1 = 0.1296 r^3$ $Z_2 = 0.0956 r^3$
	$b(H-h)$	$\frac{H}{2}$	$\frac{b}{12}(H^3-h^3)$	$\frac{b}{6H}(H^3-h^3)$
	$A^2 - a^2$	$\frac{A}{2}$	$\frac{A^4 - a^4}{12}$	$\frac{1}{6} \frac{A^4 - a^4}{A}$
	$A^2 - a^2$	$\frac{A}{2} \sqrt{2}$	$\frac{A^4 - a^4}{12}$	$\frac{A^4 - a^4}{12 A} \sqrt{2}$ $= \frac{0.1179(A^4 - a^4)}{A}$
	$\frac{\pi}{4}(d_2^2 - d_1^2)$	$\frac{d_2}{2}$	$\frac{\pi}{64}(d_2^4 - d_1^4)$ $= \frac{\pi}{4}(R^4 - r^4)$	$\frac{\pi}{32} \left(\frac{d_2^4 - d_1^4}{d_2}\right)$ $= \frac{\pi}{4} \times \frac{R^4 - r^4}{R}$
	$a^2 - \frac{\pi d^2}{4}$	$\frac{a}{2}$	$\frac{1}{12} \left(a^4 - \frac{3\pi}{16} d^4\right)$	$\frac{1}{6a} \left(a^4 - \frac{3\pi}{16} d^4\right)$
	$2b(h-d)$ $+ \frac{\pi}{4} d^2$	$\frac{h}{2}$	$\frac{1}{12} \left\{ \frac{3\pi}{16} d^4 \right.$ $+ b(h^3 - d^3)$ $\left. + b^3(h-d) \right\}$	$\frac{1}{6h} \left\{ \frac{3\pi}{16} d^4 \right.$ $+ b(h^3 - d^3)$ $\left. + b^3(h-d) \right\}$
	$2b(h-d) +$ $\frac{\pi}{4}(d_1^2 - d_2^2)$	$\frac{h}{2}$	$\frac{1}{12} \left\{ \frac{3\pi}{16} (d_1^4 - d_2^4) \right.$ $+ b(h^3 - d_1^3)$ $\left. + b^3(h-d_1) \right\}$	$\frac{1}{6h} \left\{ \frac{3\pi}{16} (d_1^4 - d_2^4) \right.$ $+ b(h^3 - d_1^3)$ $\left. + b^3(h-d_1) \right\}$

CONVERSION CHART OF TRIGONOMETRICAL FUNCTIONS

When deg (angle) = 0° 00' ~ 11° 50'					When deg (angle) = 12° 00' ~ 23° 50'				
θ (theta) deg (angle)	sin θ value	cos θ value	tan θ value	cot θ value	θ (theta) deg (angle)	sin θ value	cos θ value	tan θ value	cot θ value
0° 00'	.0000	1.0000	.0000	∞	90° 00'	.2079	.9781	.2126	4.7046
10	.0029	1.0000	.0029	343.77	50	.2108	.9775	.2156	4.6382
20	.0058	1.0000	.0058	171.89	40	.2136	.9769	.2186	4.5736
30	.0087	1.0000	.0087	114.59	30	.2164	.9763	.2217	4.5107
40	.0116	0.9999	.0116	85.940	20	.2193	.9757	.2247	4.4494
50	.0145	.9999	.0145	68.750	10	.2221	.9750	.2278	4.3897
1° 00'	.0175	.9998	.0175	57.290	89° 00'	.2250	.9744	.2309	4.3315
10	.0204	.9998	.0204	49.104	50	.2278	.9737	.2339	4.2747
20	.0233	.9997	.0233	42.964	40	.2306	.9730	.2370	4.2193
30	.0262	.9997	.0262	38.188	30	.2334	.9724	.2401	4.1653
40	.0291	.9996	.0291	34.368	20	.2363	.9717	.2432	4.1126
50	.0320	.9995	.0320	31.242	10	.2391	.9710	.2462	4.0611
2° 00'	.0349	.9994	.0349	28.636	88° 00'	.2419	.9703	.2493	4.0108
10	.0378	.9993	.0378	26.432	50	.2447	.9696	.2524	3.9617
20	.0407	.9992	.0407	24.542	40	.2476	.9689	.2555	3.9136
30	.0436	.9990	.0437	22.904	30	.2504	.9681	.2586	3.8667
40	.0465	.9989	.0466	21.470	20	.2532	.9674	.2617	3.8208
50	.0494	.9988	.0495	20.206	10	.2560	.9667	.2648	3.7760
3° 00'	.0523	.9986	.0524	19.081	87° 00'	.2588	.9659	.2679	3.7321
10	.0552	.9985	.0553	18.075	50	.2616	.9652	.2711	3.6891
20	.0581	.9983	.0582	17.169	40	.2644	.9644	.2742	3.6470
30	.0610	.9981	.0612	16.350	30	.2672	.9636	.2773	3.6059
40	.0640	.9980	.0641	15.605	20	.2700	.9628	.2805	3.5656
50	.0669	.9978	.0670	14.924	10	.2728	.9621	.2836	3.5261
4° 00'	.0698	.9976	.0699	14.301	86° 00'	.2756	.9613	.2867	3.4874
10	.0727	.9974	.0729	13.727	50	.2784	.9605	.2899	3.4495
20	.0756	.9971	.0758	13.197	40	.2812	.9596	.2931	3.4124
30	.0785	.9969	.0787	12.706	30	.2840	.9588	.2962	3.3759
40	.0814	.9967	.0816	12.251	20	.2868	.9580	.2994	3.3402
50	.0843	.9964	.0846	11.826	10	.2896	.9572	.3026	3.3052
5° 00'	.0872	.9962	.0875	11.430	85° 00'	.2924	.9563	.3057	3.2709
10	.0901	.9959	.0904	11.059	50	.2952	.9555	.3089	3.2371
20	.0929	.9957	.0934	10.712	40	.2979	.9546	.3121	3.2041
30	.0958	.9954	.0963	10.385	30	.3007	.9537	.3153	3.1716
40	.0987	.9951	.0992	10.078	20	.3035	.9528	.3185	3.1397
50	.1016	.9948	.1022	9.7882	10	.3062	.9520	.3217	3.1084
6° 00'	.1045	.9945	.1051	9.5144	84° 00'	.3090	.9511	.3249	3.0777
10	.1074	.9942	.1080	9.2553	50	.3118	.9502	.3281	3.0475
20	.1103	.9939	.1110	9.0098	40	.3145	.9492	.3314	3.0178
30	.1132	.9936	.1139	8.7769	30	.3173	.9483	.3346	2.9887
40	.1161	.9932	.1169	8.5555	20	.3201	.9474	.3378	2.9600
50	.1190	.9929	.1198	8.3450	10	.3228	.9465	.3411	2.9319
7° 00'	.1219	.9925	.1228	8.1443	83° 00'	.3256	.9455	.3443	2.9042
10	.1248	.9922	.1257	7.9530	50	.3283	.9446	.3476	2.8770
20	.1276	.9918	.1287	7.7704	40	.3311	.9436	.3508	2.8502
30	.1305	.9914	.1317	7.5958	30	.3338	.9426	.3541	2.8239
40	.1334	.9911	.1346	7.4287	20	.3365	.9417	.3574	2.7980
50	.1363	.9907	.1376	7.2687	10	.3393	.9407	.3607	2.7725
8° 00'	.1392	.9903	.1405	7.1154	82° 00'	.3420	.9397	.3640	2.7475
10	.1421	.9899	.1435	6.9682	50	.3448	.9387	.3673	2.7228
20	.1449	.9894	.1465	6.8269	40	.3475	.9377	.3706	2.6985
30	.1478	.9890	.1495	6.6912	30	.3502	.9367	.3739	2.6746
40	.1507	.9886	.1524	6.5606	20	.3529	.9356	.3772	2.6511
50	.1536	.9881	.1554	6.4348	10	.3557	.9346	.3805	2.6279
9° 00'	.1564	.9877	.1584	6.3138	81° 00'	.3584	.9336	.3839	2.6051
10	.1593	.9872	.1614	6.1970	50	.3611	.9325	.3872	2.5826
20	.1622	.9868	.1644	6.0844	40	.3638	.9315	.3906	2.5605
30	.1650	.9863	.1673	5.9758	30	.3665	.9304	.3939	2.5386
40	.1679	.9858	.1703	5.8708	20	.3692	.9293	.3973	2.5172
50	.1708	.9853	.1733	5.7694	10	.3719	.9283	.4006	2.4960
10° 00'	.1736	.9848	.1763	5.6713	80° 00'	.3746	.9272	.4040	2.4751
10	.1765	.9843	.1793	5.5764	50	.3773	.9261	.4074	2.4545
20	.1794	.9838	.1823	5.4845	40	.3800	.9250	.4108	2.4342
30	.1822	.9833	.1853	5.3955	30	.3827	.9239	.4142	2.4142
40	.1851	.9827	.1883	5.3093	20	.3854	.9228	.4176	2.3945
50	.1880	.9822	.1914	5.2257	10	.3881	.9216	.4210	2.3750
11° 00'	.1908	.9816	.1944	5.1446	79° 00'	.3907	.9205	.4245	2.3559
10	.1937	.9811	.1974	5.0658	50	.3934	.9194	.4279	2.3369
20	.1965	.9805	.2004	4.9894	40	.3961	.9182	.4314	2.3183
30	.1994	.9799	.2035	4.9152	30	.3987	.9171	.4348	2.2998
40	.2022	.9793	.2065	4.8430	20	.4014	.9159	.4383	2.2817
50	.2051	.9787	.2095	4.7729	10	.4041	.9147	.4417	2.2637
When deg (angle) = 78° 10' ~ 90° 00'					When deg (angle) = 66° 10' ~ 78° 00'				
cos θ value	sin θ value	cot θ value	tan θ value	deg (angle)	cos θ value	sin θ value	cot θ value	tan θ value	deg (angle)
θ (theta)					θ (theta)				



$$a = \frac{b}{\cos \theta}, \quad \frac{c}{\sin \theta}$$

$$b = a \cdot \cos \theta, \quad \frac{c}{\tan \theta}$$

$$c = a \cdot \sin \theta, \quad b \cdot \tan \theta$$

θ (theta)	When deg (angle) = 24° 00' ~ 35° 50'				
deg (angle°)	sin θ value	cos θ value	tan θ value	cot θ value	
24° 00'	.4067	.9135	.4452	2.2460	66° 00'
10	.4094	.9124	.4487	2.2286	50
20	.4120	.9112	.4522	2.2113	40
30	.4147	.9100	.4557	2.1943	30
40	.4173	.9088	.4592	2.1775	20
50	.4200	.9075	.4628	2.1609	10
25° 00'	.4226	.9063	.4663	2.1445	65° 00'
10	.4253	.9051	.4699	2.1283	50
20	.4279	.9038	.4734	2.1123	40
30	.4305	.9026	.4770	2.0965	30
40	.4331	.9013	.4806	2.0809	20
50	.4358	.9001	.4841	2.0655	10
26° 00'	.4384	.8988	.4877	2.0503	64° 00'
10	.4410	.8975	.4913	2.0353	50
20	.4436	.8962	.4950	2.0204	40
30	.4462	.8949	.4986	2.0057	30
40	.4488	.8936	.5022	1.9912	20
50	.4514	.8923	.5059	1.9768	10
27° 00'	.4540	.8910	.5095	1.9626	63° 00'
10	.4566	.8897	.5132	1.9486	50
20	.4592	.8884	.5169	1.9347	40
30	.4617	.8870	.5206	1.9210	30
40	.4643	.8857	.5243	1.9074	20
50	.4669	.8843	.5280	1.8940	10
28° 00'	.4695	.8829	.5317	1.8807	62° 00'
10	.4720	.8816	.5354	1.8676	50
20	.4746	.8802	.5392	1.8546	40
30	.4772	.8788	.5430	1.8418	30
40	.4797	.8774	.5467	1.8291	20
50	.4823	.8760	.5505	1.8165	10
29° 00'	.4848	.8746	.5543	1.8040	61° 00'
10	.4874	.8732	.5581	1.7917	50
20	.4899	.8718	.5619	1.7796	40
30	.4924	.8704	.5658	1.7675	30
40	.4950	.8689	.5696	1.7556	20
50	.4975	.8675	.5735	1.7437	10
30° 00'	.5000	.8660	.5774	1.7321	60° 00'
10	.5025	.8646	.5812	1.7205	50
20	.5050	.8631	.5851	1.7090	40
30	.5075	.8616	.5890	1.6977	30
40	.5100	.8601	.5930	1.6864	20
50	.5125	.8587	.5969	1.6753	10
31° 00'	.5150	.8572	.6009	1.6643	59° 00'
10	.5175	.8557	.6048	1.6534	50
20	.5200	.8542	.6088	1.6426	40
30	.5225	.8526	.6128	1.6319	30
40	.5250	.8511	.6168	1.6212	20
50	.5275	.8496	.6208	1.6107	10
32° 00'	.5299	.8480	.6249	1.6003	58° 00'
10	.5324	.8465	.6289	1.5900	50
20	.5348	.8450	.6330	1.5798	40
30	.5373	.8434	.6371	1.5697	30
40	.5398	.8418	.6412	1.5597	20
50	.5422	.8403	.6453	1.5497	10
33° 00'	.5446	.8387	.6494	1.5399	57° 00'
10	.5471	.8371	.6536	1.5301	50
20	.5495	.8355	.6577	1.5204	40
30	.5519	.8339	.6619	1.5108	30
40	.5544	.8323	.6661	1.5013	20
50	.5568	.8307	.6703	1.4919	10
34° 00'	.5592	.8290	.6745	1.4826	56° 00'
10	.5616	.8274	.6787	1.4733	50
20	.5640	.8258	.6830	1.4641	40
30	.5664	.8241	.6873	1.4550	30
40	.5688	.8225	.6916	1.4460	20
50	.5712	.8208	.6959	1.4370	10
35° 00'	.5736	.8192	.7002	1.4281	55° 00'
10	.5760	.8175	.7046	1.4193	50
20	.5783	.8158	.7089	1.4106	40
30	.5807	.8141	.7133	1.4019	30
40	.5831	.8124	.7177	1.3934	20
50	.5854	.8107	.7221	1.3848	10
	cos θ value	sin θ value	cot θ value	tan θ value	deg (angle°)
	When deg (angle) = 54° 10' ~ 66° 00'				
	θ (theta)				

θ (theta)	When deg (angle) = 36° 00' ~ 45° 00'				
deg (angle°)	sin θ value	cos θ value	tan θ value	cot θ value	
36° 00'	.5878	.8090	.7265	1.3764	54° 00'
10	.5901	.8073	.7310	1.3680	50
20	.5925	.8056	.7355	1.3597	40
30	.5948	.8039	.7400	1.3514	30
40	.5972	.8021	.7445	1.3432	20
50	.5995	.8004	.7490	1.3351	10
37° 00'	.6018	.7986	.7536	1.3270	53° 00'
10	.6041	.7969	.7581	1.3190	50
20	.6065	.7951	.7627	1.3111	40
30	.6088	.7934	.7673	1.3032	30
40	.6111	.7916	.7720	1.2954	20
50	.6134	.7898	.7766	1.2876	10
38° 00'	.6157	.7880	.7813	1.2799	52° 00'
10	.6180	.7862	.7860	1.2723	50
20	.6202	.7844	.7907	1.2647	40
30	.6225	.7826	.7954	1.2572	30
40	.6248	.7808	.8002	1.2497	20
50	.6271	.7790	.8050	1.2423	10
39° 00'	.6293	.7771	.8098	1.2349	51° 00'
10	.6316	.7753	.8146	1.2276	50
20	.6338	.7735	.8195	1.2203	40
30	.6361	.7716	.8243	1.2131	30
40	.6383	.7698	.8292	1.2059	20
50	.6406	.7679	.8342	1.1988	10
40° 00'	.6428	.7660	.8391	1.1918	50° 00'
10	.6450	.7642	.8441	1.1847	50
20	.6472	.7623	.8491	1.1778	40
30	.6494	.7604	.8541	1.1708	30
40	.6517	.7585	.8591	1.1640	20
50	.6539	.7566	.8642	1.1571	10
41° 00'	.6561	.7547	.8693	1.1504	49° 00'
10	.6583	.7528	.8744	1.1436	50
20	.6604	.7509	.8796	1.1369	40
30	.6626	.7490	.8847	1.1303	30
40	.6648	.7470	.8899	1.1237	20
50	.6670	.7451	.8952	1.1171	10
42° 00'	.6691	.7431	.9004	1.1106	48° 00'
10	.6713	.7412	.9057	1.1041	50
20	.6734	.7392	.9110	1.0977	40
30	.6756	.7373	.9163	1.0913	30
40	.6777	.7353	.9217	1.0850	20
50	.6799	.7333	.9271	1.0786	10
43° 00'	.6820	.7314	.9325	1.0724	47° 00'
10	.6841	.7294	.9380	1.0661	50
20	.6862	.7274	.9435	1.0599	40
30	.6884	.7254	.9490	1.0538	30
40	.6905	.7234	.9545	1.0477	20
50	.6926	.7214	.9601	1.0416	10
44° 00'	.6947	.7193	.9657	1.0355	46° 00'
10	.6967	.7173	.9713	1.0295	50
20	.6988	.7153	.9770	1.0235	40
30	.7009	.7133	.9827	1.0176	30
40	.7030	.7112	.9884	1.0117	20
50	.7050	.7092	.9942	1.0058	10
45° 00'	.7071	.7071	1.0000	1.0000	45° 00'
	cos θ value	sin θ value	cot θ value	tan θ value	deg (angle°)
	When deg (angle) = 45° 00' ~ 54° 00'				
	θ (theta)				

Finding the trigonometrical function value from the conversion chart

When deg (angle) is 0° 00' ~ 45° 00'

- Select the θ column on the left side of the conversion chart and find the deg (angle°).
- After verifying the type of trigonometrical function listed at the top of the conversion chart, determine the value of the target deg (angle°).

ex.) $\sin 5^\circ = 0.0872$
 $\cos 5^\circ = 0.9962$
 $\tan 5^\circ = 0.0875$
 $\cot 5^\circ = 11.430$

When deg (angle) is 45° 00' ~ 90° 00'

- Select the θ column on the right side of the conversion chart and find the deg (angle°).
- After verifying the type of trigonometrical function listed at the bottom of the conversion chart, determine the value of the target deg (angle°).

ex.) $\sin 85^\circ = 0.9962$
 $\cos 85^\circ = 0.0872$
 $\tan 85^\circ = 11.430$
 $\cot 85^\circ = 0.0875$

⚠ If the deg (angle°) includes figures after the decimal point, convert to a value of degrees (°) and minutes (').
 Ex.: 5.5° becomes 5° 30' (5 degrees, 30 minutes). (1 degree = 60 minutes)

Carbon Steels and Alloy Steels for Machine Structural Use

Japan Industrial Standards		Steel types in foreign standards					Γ O C T
Standard No. Name	Symbol	I S O 6837/1:10-11 ⁵⁾	BS 970 Part1.3 BS EN 10083-1,2	DIN EN 10084 DIN EN 10083-1,2	NF A35-551 NF EN 10083-1,2	Γ O C T 4543	
JIS G 4051 Carbon steels for machine structural use	S10C	C10	—	C10E C10R	XC10	—	
	S12C	—	—	C10E C10R	XC12	—	
	S15C	C15E4 C15M2	—	C15E C15R	—	—	
	S17C	—	—	—	XC18	—	
	S20C	—	—	C22 C22E C22R	C22 C22E C22R	—	
	S22C	—	—	—	—	—	
	S25C	C25 C25E4 C25M2	—	C25 C25E C25R	C25 C25E C25R	—	
	S28C	—	—	—	—	25 Γ	
	S30C	C30 C30E4 C30M2	—	C30 C30E C30R	C30 C30E C30R	30 Γ	
	S33C	—	—	—	—	30 Γ	
	S35C	C35 C35E4 C35M2	—	C35 C35E C35R	C35 C35E C35R	35 Γ	
	S38C	—	—	—	—	35 Γ	
	S40C	C40 C40E4 C40M2	—	C40 C40E C40R	C40 C40E C40R	40 Γ	
	S43C	—	—	—	—	40 Γ	
	S45C	C45 C45E4 C45M2	—	C45 C45E C45R	C45 C45E C45R	45 Γ	
	S48C	—	—	—	—	45 Γ	
S50C	C50 C50E4 C50M2	—	C50 C50E C50R	C50 C50E C50R	50 Γ		
S53C	—	—	—	—	50 Γ		
S55C	C55 C55E4 C55M2	—	C55 C55E C55R	C55 C55E C55R	—		
S58C	C60 C60E4 C60M2	—	C60 C60E C60R	C60 C60E C60R	60 Γ		
S09CK	—	—	—	—	—		
S15CK	—	—	—	—	—		
S20CK	—	—	—	—	—		

ISO: International Organization for Standardization
 AISI: American Iron and Steel Institute
 SAE: Society of Automotive Engineers
 BS: British Standards

Japan Industrial Standards		Steel types in foreign standards					Γ O C T
Standard No. Name	Symbol	I S O 6837/1:10-11 ⁵⁾	AISI SAE	BS 970 Part1.3 BS EN 10083-1,2	DIN EN 10084 DIN EN 10083-1,2	NF A35-551 NF EN 10083-1,2	Γ O C T 4543
JIS G 4102 Nickel chromium steels	SNC236	—	—	—	—	—	40XH
	SNC415	—	—	—	—	—	—
	SNC631	—	—	—	—	—	30XHRA
	SNC815	15NiCr13	—	655M13	15NiCr13	—	—
JIS G 4103 Nickel chromium steels	SNCM220	20NiCrMo2 20NiCrMoS2	8615 8617 8620 8622	805A20 805M20 805A22 805M22	20NiCrMo2 20NiCrMoS2	20NiCrMo2	—
	SNCM240	41CrNiMo2 41CrNiMoS2	8637 8640	—	—	—	—
	SNCM415	—	—	—	—	—	20X2M(20XHM)
	SNCM420	—	4320	—	—	—	—
	SNCM431	—	—	—	—	—	—
	SNCM439	—	4340	—	—	—	—
JIS G 4104 Chromium steels	SNCM447	—	—	—	—	—	—
	SNCM616	—	—	—	—	—	—
	SNCM625	—	—	—	—	—	—
	SNCM630	—	—	—	—	—	—
	SNCM635	—	—	—	—	—	—
	SNCM815	—	—	—	—	—	—
	SC415	—	—	—	17Cr3 17CrS3	—	15X 15XA
	SC420	—	20Cr4 20CrS4	5120	—	—	20X
	SC430	—	34Cr4 34CrS4	5130 5132	34Cr4 34CrS4	34Cr4 34CrS4	30X
	SC435	—	34Cr4 34CrS4 37Cr4 37CrS4	5132	37Cr4 37CrS4	37Cr4 37CrS4	35X
JIS G 4105 Chromium molybdenum steels	SC440	—	37Cr4 37CrS4 41Cr4 41CrS4	5140	530M40 41Cr4 41CrS4	41Cr4 41CrS4	40X
	SC445	—	—	—	—	—	45X
	SCM415	—	—	—	—	—	—
	SCM418	—	18CrMo4 18CrMoS4	—	18CrMo4 18CrMoS4	—	20XM
	SCM420	—	—	—	—	—	20XM
	SCM421	—	—	—	708M20	—	—
	SCM430	—	—	4131	—	—	30XM 30XMA
	SCM432	—	—	—	—	—	—
	SCM435	—	34CrMo4 34CrMoS4	4137	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	35XM
	SCM440	—	42CrMo4 42CrMoS4	4140 4142	708M40 42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	—
SCM445	—	—	4145 4147	—	—	—	
SCM822	—	—	—	—	—	—	

DIN: Deutsches Institut für Normung
 EN: European Standards
 NF: Norme Française
 Γ OCT: National standard of the former USSR

Japan Industrial Standards		Steel types in foreign standards					O C T
Standard No.	Symbol	I S O	AI S I	BS	DIN EN	NF	Γ
Name		683/1,10,11 ⁵⁾	SAE	EN 10083-1,2	EN 10083-1,2	EN 10083-1,2	4543
JIS G 4106	SMn420	22Mn6	1522	150M19	—	—	—
Manganese steels and manganese chromium steels for machine structural use	SMn433	—	1534	150M36	—	—	30 Γ 2 35 Γ 2
	SMn438	36Mn6	1541	150M36	—	—	35 Γ 2 40 Γ 2
	SMn443	42Mn6	1541	—	—	—	40 Γ 2 45 Γ 2
	SMn420	—	—	—	—	—	—
	SMn443	—	—	—	—	—	—
JIS G 4202	SACM645	41CrAlMo74	—	—	—	—	—
Aluminum chromium molybdenum steels	SMn420H	22Mn6	1522H	—	—	—	—
	SMn433H	—	—	—	—	—	—
JIS G 4052	SMn438H	36Mn6	1541H	—	—	—	—
Structural steels with specified hardenability bands	SMn43H	42Mn6	1541H	—	—	—	—
	SMn420H	—	—	—	—	—	—
	SMn443H	—	—	—	—	—	—
	SCr415H	—	—	17Cr3	17CrS3	—	15X
	SCr420H	20Cr4	5120H	—	—	—	20X
	SCr430H	34Cr4	5130H	34Cr4	34CrS4	34Cr4	30X
	SCr435H	37Cr4	5135H	37Cr4	37CrS4	37Cr4	35X
	SCr440H	41Cr4	5140H	41Cr4	41CrS4	41Cr4	40X
	SCM415H	—	—	—	—	—	—
	SCM418H	18CrMo4	—	18CrMo4	18CrMoS4	—	—
	SCM420H	—	—	70RH20	—	—	—
	SCM435H	34CrMo4	4135H	34CrMo4	34CrMoS4	34CrMo4	—
	SCM440H	42CrMo4	4140H	42CrMo4	42CrMoS4	42CrMo4	—
	SCM445H	—	—	4145H	—	—	—
	SCM822H	—	—	4147H	—	—	—
	SNC415H	—	—	—	—	—	—
	SNC631H	—	—	—	—	—	—
	SNC815H	15NiCr13	—	65GH13	15NiCr13	—	—
	SNCM420H	20NiCrMo2	8617H	80SH17	—	—	—
	SNM420H	20NiCrMoS2	8620H	80SH20	—	20NiCr2	—
	SNM420H	—	8622H	80SH22	—	—	—
	—	—	4320H	—	—	—	—

Japan Industrial Standards		Steel types in foreign standards					O C T
Standard No.	Symbol	I S O	AI S I	BS	DIN EN	NF	Γ
Name		683/1,10,11 ⁵⁾	SAE	EN 10083-1,2	EN 10083-1,2	EN 10083-1,2	4543
JIS G 4107	SMB5	—	501	708 40	—	—	—
Alloy steel bolting materials for high temperature service	SMB7	42CrMo4	4140	709M40	42CrMo4 ²⁾	42CrMo4 ⁴⁾	—
	SMB16	—	4145	40CrMoV4.6 ¹⁾	40CrMoV4 ³⁾	40CrMoV4.6 ⁵⁾	—
	SMB22-1 ~ 5	42CrMo4	4142H	40CrMoV4.6 ¹⁾	40CrMoV4 ³⁾	40CrMoV4.6 ⁵⁾	—
	SMB22-1 ~ 5	42CrMo4	4142H	40CrMoV4.6 ¹⁾	40CrMoV4 ³⁾	40CrMoV4.6 ⁵⁾	—
	SMB24-1 ~ 5	—	—	—	—	—	—
	SMB24-1 ~ 5	—	—	—	—	—	—

Notes 1) BS EN 10259
2) DIN 1654 Part 4
3) DIN 17240
4) NF EN 10259
5) ISO6883-1, 10, and 11 have been translated into JIS as JIS G 7501, G 7502, and G 7503.

Tool steel name

Rolled steel for general structures SS-400 Steel, Structure, 400 N/mm²
Carbon steel for mechanical structures S45C Steel, 0.45% C
Chrome molybdenum steel SCM435 Steel, Cr, Mo 435
Nickel chrome molybdenum steel SNCM220 Steel, Ni, Cr, Mo, 220
Carbon tool steel SK105 Steel, Tool, 105
(formerly SK3)
Alloy tool steel SKS3 Steel, Tool, Special, Type 3
Alloy tool steel SKD11 Steel, Tool, Dies, Type 11
High-speed tool steel SKH51 Steel, Tool, High Speed, Type 51
High carbon chrome bearing steel SUJ2 Steel, Use, Bearing, Type 2
Stainless steel SUS304 Steel, Use, Stainless, Type 304
Gray cast iron FC250 Ferrum (Iron), Cast, 250 N/mm²

Tool Steels

JIS		Steel types in foreign standards						
Standard No./name	Symbol	ISO	AISI ASTM	BS	DIN VDEh	NF	Γ OCT	
JIS G 4401 Carbon tool steels	SK14 (formerly SK1)	TC140	—	—	—	C140E3U	Y13	
	SK20 (formerly SK2)	TC120	W1—11 ¹ / ₂	—	—	C120E3U	Y12	
	SK105 (formerly SK3)	TC105	W1—10	—	C105W1	C105E2U	Y11	
	SK65 (formerly SK4)	TC 90	W1—9	—	—	C 90E2U	Y10	
	SK65 (formerly SK5)	TC 90	W1—8	—	C 80W1	C 90E2U	Y8Γ	
	SK75 (formerly SK6)	TC 80	—	—	C 80W1	C 80E2U	Y9	
JIS G 4403 High speed tool steels	SKH 2	—	—	—	C 70W2	C 70E2U	Y7	
	SKH 3	HS18—0—1	T 1	BT 1	—	HS18—0—1	P18	
	SKH 4	HS18—1—5	T 4	BT 4	S18—1—2—5	HS18—1—5	—	
	SKH 5	HS18—0—1—0	T 5	BT 5	—	HS18—0—2—9	—	
	SKH10	HS12—1—5—5	T15	BT15	S12—1—4—5	HS12—1—5—5	—	
	SKH51	HS 6—5—2	M2	BM 2	S 6—5—2	HS 6—5—2	—	
	SKH52	—	M3—1	—	—	—	—	
	SKH53	HS 6—5—3	M3—2	—	S 6—5—3	HS 6—5—3	—	
	SKH54	—	M4	BM 4	—	HS 6—5—4	—	
	SKH55	HS 6—5—2—5	—	BM35	S 6—5—2—5	HS 6—5—2—5HC	P6M5K5	
	SKH56	—	—	M36	—	—	—	
	SKH57	HS10—4—3—10	—	BT42	S10—4—3—10	HS10—4—3—10	—	
SKH58	HS 2—9—2	M7	—	—	HS 2—9—2	—		
SKH59	HS 2—9—1—8	M42	BM42	S 2—10—1—8	HS 2—9—1—8	—		
JIS G 4404 Alloy tool steels	SKS11	—	F2	—	—	—	XB4	
	SKS 2	105WC1	—	—	105WC6	105WC5	XBΓ	
	SKS21	—	—	—	—	—	—	
	SKS 5	—	—	—	—	—	—	
	SKS51	—	L6	—	—	—	—	
	SKS 7	—	—	—	—	—	—	
	SKS 8	—	—	—	—	C140E3UC4	13X	
	SKS 4	—	—	—	—	—	—	
	SKS41	—	—	—	—	—	—	
	SKS43	TC105	W2—9 ¹ / ₂	—	—	100V2	—	
	SKS44	—	W2—8	—	—	—	—	
	SKS 3	105WC1	—	—	—	105WC6	105WC5	9XBΓ
SKS31	—	—	—	—	—	—		
SKS93	—	—	—	—	—	—		
SKS94	—	—	—	—	—	—		
SKS95	—	—	—	—	—	—		
SKD 1	210Cr12	D3	BD3	BD3	X210Cr12	X200Cr12	X12	
SKD11	—	D2	BD2	—	—	X160CrMoV12	—	
SKD12	100CrMoV5	A2	BA2	—	—	X100CrMoV5	—	
SKD 4	30WCrV5	—	—	—	—	X32WCrV5	—	
SKD 5	30WCrV9	—	—	—	—	X30WCrV9	—	
SKD 6	—	—	—	—	—	X38CrMoV51	4X5M C	
SKD61	40CrMoV5	H11	BH11	—	—	X38CrMoV5	4X5M C	
SKD62	—	H13	BH13	—	—	X40CrMoV51	4X0CrMoV5	
SKD62	—	H12	BH12	—	—	X35CrWMoV5	3X3M3	

JIS		Steel types in foreign standards						
Standard No./name	Symbol	ISO	AISI ASTM	BS	DIN VDEh	NF	Γ OCT	
JIS G 4404 (Continued)	SKD 7	30CrMoV3	H10	BH10	—	X32CrMoV33	32CrMoV12—18	
	SKD 8	—	H19	BH19	—	—	—	
	SKT 3	—	—	—	—	55CrNiMoV4	—	
	SKT 4	55NiCrMoV2	—	—	BH224/5	55NiCrMoV6	55NiCrMoV7	
Special Purpose Steels								
JIS		Steel types in foreign standards						
Standard No./name	Symbol	ISO	AISI SAE	BS	DIN	NF	Γ OCT	
JIS G 4801 Spring steels	SUP 3	—	1075	—	—	—	75 80	
	SUP 6	59S17	1078	—	—	—	85	
	SUP 7	59S17	9260	—	—	60Si7	60C2	
	SUP 9	55Cr3	5155	—	55Cr3	60Si7	60C2Γ	
	SUP 9A	—	5160	—	55Cr3	55Cr3	—	
	SUP10	51CrV4	6150	735A51,735H51	50CrV4	51CrV4	XφA50XT φA	
	SUP11A	60CrB3	51B60	—	—	—	50XFP	
	SUP12	55SiCr63	9254	685A57,685H57	54SiCr6	54SiCr6	—	
	SUP13	60CrMo33	4161	705A60,705H60	—	60CrMo4	—	
	SUM11	—	1110	—	—	—	—	
	SUM12	—	1108	—	—	—	—	
	SUM21	9 S20	1212	—	—	—	—	
JIS G 4804 Free cutting carbon steels	SUM22	11SMn28	1213	(230M07)	9 SMn28	S250	—	
	SUM22L	11SMnPb28	12L13	—	9 SMnPb28	S250Pb	—	
	SUM23	—	1215	—	—	—	—	
	SUM23L	—	—	—	—	—	—	
	SUM24L	11SMnPb28	12L14	—	9 SMnPb28	S250Pb	—	
	SUM25	12SMn35	—	—	9 SMn36	S300	—	
	SUM31	—	1117	—	15S10	—	—	
	SUM31L	—	—	—	—	—	—	
JIS G 4805 High carbon chromium bearing steels	SUM32	—	—	210M15,210M15	—	(13MF4)	—	
	SUM41	—	1137	—	—	(35MF6)	—	
	SUM42	—	1141	—	—	(45MF6.1)	—	
	SUM43	44SMn28	1144	(226M44)	—	(45MF6.3)	—	
	SUU 1	—	51100	—	—	—	—	
	SUJ 2	B1 or 100Cr6	52100	—	100Cr6	100Cr6	100Cr6	
	SUJ 3	B2 or 100MnS4—4	—	ASTM A 485 Grade 1	—	—	100Cr6	
	SUJ 4	—	—	—	—	—	—	
	SUJ 5	—	—	—	—	—	—	

COMPARISON OF DIE STEEL BY MANUFACTURERS

■ COMPARISON OF DIE STEEL BY MANUFACTURERS

Type	Symbols in foreign standards				ISO
	JIS	AISI	DIN		
Carbon tool steels	SK105 (former SK3)	W1-10		TC105	
	SKS93				
	SKS3	D3		X210Cr12	
	SKD1				
Alloy tool steel	SKD11	D2	X210Cr12	X210Cr12W12	
	SKD11 (modified)				
	Matrix group O/SKD				
	SKD12				
	Pre-hardened 40 HRC	A2		X100CrMoV5	
	Pre-hardened 50 HRC/60 HRC				
	Flame-hardened steel				
	Low temperature cryocool steel				
	Impact resistant steel				
	Others				
High-speed tool steel	SKH51	M2	H6.5.2	HS6-5-2	
	SKH55 group		S6.2.5	HS6-5-2-5	
	SKH57 group		S10-4-3-10	HS10-4-3-10	
	Matrix group				
Powdered high-speed tool steel	SKH40			HS6-5-3-8	
	Matrix group				
	Others				

Reference material: Special Steels Nov. 2001 edition

Hitachi Metals	Aichi Steel	Kobe Steel	Sumi Special Steel	Daido Steel	Nippon Koshuha Steel Group	Nachi-Fujikoshi Corp	Riken Seiko	Uddeholm (Sweden)	Bohler (Germany)
YG3	SK3		QK3	YK3	K3				K990
YCS3	SK301		QKSM	YK30	K3M	SK3M			
SGT	SKS3		QKS3	GDA	K3S	SKS3	RS3	ARNE	K460
GRD	SKD1		QC1	DC1	KD1			SYERKER3	K100 K107
SLD	SKD11		QC11	DC11	KD11	CDS11	RD11	SYERKER21	K105 K110
SLD8	AUD15		OCM8	DC53	KD11S	MDS9		SLEIPNER	K340
SLD10	AUD15		OCM10	DC53	KD21				
ARK1	SXACE		OCM7	DCX	KD12			RIGOR	K305
SCD	SKD12			DC12	KAP65			IMPAX	
HPM2T				G040F	R055				
PRE2				CX1					
HMD5	SX105V		QF3	G05	FH5			FERNO	
HMD1	SX4			G04	KSM				
ACD37	AKS3			G04	KSM				
YSM	AKS4		QF1	G55	KTV5	SRS6		PREGA COMPAX	K630
								CALMAX	
								VIKING	
								ELMAX	
								VANADIS4	K190
								VANADIS6	
								VANADIS10	
ACD8	AUD11 SX5 SX44					ICS22 MCR1			
YXM1			QH51	MH51	H51	SKH9	RHM1		S600
YXM4				MH55	HM35	HM35 HS53M	RHM5		S705
XVC5				MH8	MV10	HS99R HS98M FM38V	RHM7		S700
YXR33 YXR3 YXR7			QHZ	MH85 MH88	KXM KM2 KM3	MDS1 MDS3 MDS7			
HAP40		KHA30		DEX40		MATRIX2 ATM3			
HAP5R		KHA3VN		DEX-M1 DEX-M3		FAX38		ASP30	S590
HAP10		KHA32	SPM23	DEX21		FAX31		ASP23	S690
HAP50			DEX60	DEX60		FAX55		ASP60	S390
HAP72		KHA60	SPM60	DEX80		FAXG1			
		KHA77				FAX18			
						FAXG2			
		KHA30N							
		KHA33N							
		KHA3NH							
		KHA5NH							

Matrix group: Tool steels which reduce the amount of large carbides, a cause of accelerated tool wear and reduced toughness during cutting, in order to improve cutting performance and increase tool toughness

